


A-RS



Product information

The A RS conduit adapter is intended for corrugated conduits from third party manufacturers that may have different diameters. They facilitate secure manoeuvring at the robot arm with optimum hold.

Information, conformities and approvals

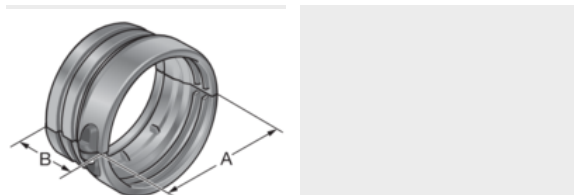

Article	Order No.	Color	A mm	B mm	Version	Suitable for Murrflex	PU pcs.
A-RS-56 sw 1)	83692280	Black	102.5	46	Split	NW52	1
A-RS-70 sw 1)	83692282	Black	102.5	46	Split	NW70	1

1) Tightening torque 1.5Nm

1) Tightening torque 1.5Nm

Material properties



mod. polyamide

Thermal properties



Temperature / temperature range

-40 °C - 110 °C

Fire properties



Fire classification

acc. to UL94: V0

A-RS

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



ROBI approval

Classification

ETIM 9: EC010745
ECLASS 14: 27439090
UNSPSC 26.0801: 40141764

General information



Made in Germany