




BZS labeling system - label rail

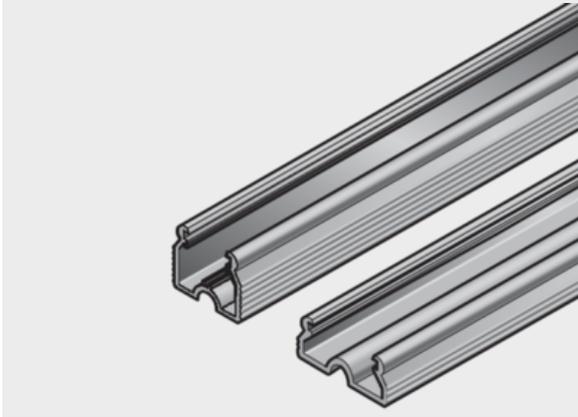

Product information

The BZS system was developed as a simple means of accommodating a great deal of labeling information in or on the control cabinet.

The label holder with the snap-in labels provides vertical and horizontal designations on terminal blocks and other components. It may be fitted on the top-hat rail, C-rail or the cable duct with a high degree of flexibility.

The label holders can be trimmed to any length and they are available in 9 mm and 15 mm widths.

Different mounting modules are available for fixing (see "BZS labeling system - Mounting").

The label plates in the label holders can be protected with covers (see "BZS and BZS/F label holder - cover").

Information, conformities and approvals



| Article | Order No. | Color | Length mm | Width mm | Recommended Label | PU pcs. |
|--|-----------|-------|-----------|----------|-------------------|---------|
| Label rail for mounting labels at 9 mm width | | | | | | |
| BZS 09 - 500 | 86301222 | Black | 500 | 9 | KSO x/9 | 25 |
| BZS 09 - 600 | 86301224 | Black | 600 | 9 | KSO x/9 | 25 |
| BZS 09 - 1000 | 86301226 | Black | 1000 | 9 | KSO x/9 | 25 |
| BZS 09 - 1300 | 86301228 | Black | 1300 | 9 | KSO x/9 | 25 |
| Label rail for mounting labels at 15 mm width | | | | | | |
| BZS 15 - 500 | 86301262 | Black | 500 | 15 | KS 15/x | 25 |
| BZS 15 - 600 | 86301264 | Black | 600 | 15 | KS 15/x | 25 |
| BZS 15 - 1000 | 86301266 | Black | 1000 | 15 | KS 15/x | 25 |
| BZS 15 - 1300 | 86301268 | Black | 1300 | 15 | KS 15/x | 25 |

Material properties



Polyvinyl chloride (PVC)



BZS labeling system - label rail

Thermal properties



Temperature / temperature range

-40 °C - 80 °C

Fire properties



Fire classification

V0

Classification

ETIM 9: EC000141

ECLASS 14: 27144009

UNSPSC 26.0801: 39131504

Assembly method



Snap-fit system