




KSD/KSB label plate (Polypropylene)

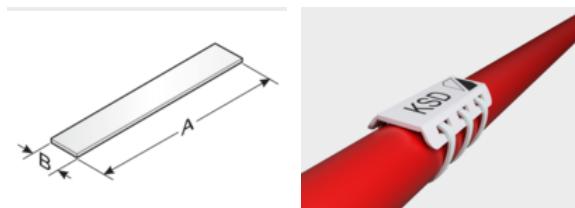

Product information

High-quality label to attach with cable ties directly onto the cables.

KSD applications-/KSBlabels

The KSD/KSB labels are a product designed for the subsequent marking of cables; it features a low-profile. The low-profile design requires that cable ties must not be tightened with a force higher than 50-60 N / 5-6 kg. Since for these small cable diameters the force intensifies at the tongues considerably, you must observe the recommended areas of application.

The material Polypropylene (PP) is intended only for labels created with the MP laser system.

KSD/KSB PP-VO articles have increased UV resistance.

Information, conformities and approvals



Article	Order No.	Color	RAL equiv.	min Diameter mm	Label size (A x B) mm	Printable area mm	Number of characters / lines	Quantity per frame	Software Article	Base plate	PU pcs.
---------	-----------	-------	------------	-----------------	-----------------------	-------------------	------------------------------	--------------------	------------------	------------	---------

Custom variants upon request (for lengthways mounting and labelling with the MP labelling system)

KSB 52x15 PP-VO	86282410	Yellow	1018		15 x 52	15 x 52	28 / 4	8	440		240
-----------------	----------	--------	------	--	---------	---------	--------	---	-----	--	-----

For lengthways mounting (long mat version); for labelling with the MP laser system

KSD 20x5L PP-VO	86282040	Yellow	1018	5	5 x 20	5 x 20	11 / 1	16	502	GP3K	480
KSD 20x5L PP-VO	86282030	White	9016	5	5 x 20	5 x 20	11 / 1	16	501	GP3K	480
KSD 30x8L PP-VO	86282042	Yellow	1018	8	8 x 30	8 x 30	16 / 2	12	505	GP3K	216
KSD 30x8L PP-VO	86282032	White	9016	8	8 x 30	8 x 30	16 / 2	12	504	GP3K	216
KSD 40x10L PP-VO	86282044	Yellow	1018	10	10 x 40	10 x 40	22 / 2	8	508	GP3K	240
KSD 40x10L PP-VO	86282034	White	9016	10	10 x 40	10 x 40	22 / 2	8	507	GP3K	240



KSD/KSB label plate (Polypropylene)

Material properties

Polypropylene (PP)



Thermal properties



Temperature / temperature range

-30 °C - 90 °C

Fire properties



Fire classification

VO

Technical information



Halogen-free

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

General technical data



Assembly method
0001000000000

Assembly method



Cable tie system with plate

Labelling technology



Laser

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.