



Typ KFW




Product information

The KFW bulkhead fittings are made of specially modified polyamide 6. The material is self-extinguishing, and halogen, phosphor and cadmium-free. Bulkhead fittings are available with a metric or Pg thread. The KFW bulkhead fittings with thread are used with both cable and conduit fittings.

The KFW bulkhead fittings feature the following advantages:

- System divided in two for very quick and easy installation of cables
- Subsequent installation of cables is simplified by removable upper part
- Gasket included in delivery

Information, conformities and approvals

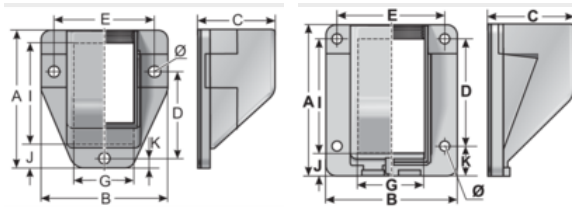

Article	Order No.	Color	UV	Internal thread	A mm	B mm	C mm	D mm	E mm	G mm	I mm	J mm	K mm	Ø mm	PU pcs.
KFW M16x1,5	83562450	Black	✓	M16x1,5	49	47	35	29	37	22.5	27	11	4.5	4.3	10
KFW M20x1,5	83562452	Black	✓	M20x1,5	49	47	35	29	37	22.5	27	11	4.5	4.3	10
KFW M25x1,5	83562454	Black	✓	M25x1,5	69	65	44	41.5	51.5	30	42.5	15	6	6	10
KFW M32x1,5	83562456	Black	✓	M32x1,5	90	78	55	64.5	64.5	40	68	9	16	6.5	10
KFW M40x1,5	83562458	Black	✓	M40x1,5	99	94	66	79.5	79.5	48.5	74.5	9.5	10	6.5	10
KFW M50x1,5	83562460	Black	✓	M50x1,5	116	101	76	87.5	87.5	68.5	89.5	9.5	16	6.5	10
KFW M16x1,5	83562410	Gray	✗	M16x1,5	49	47	35	29	37	22.5	27	11	4.5	4.3	10
KFW M20x1,5	83562412	Gray	✗	M20x1,5	49	47	35	29	37	22.5	27	11	4.5	4.3	10
KFW M25x1,5	83562414	Gray	✗	M25x1,5	69	65	44	41.5	51.5	30	42.5	15	6	6	10
KFW M32x1,5	83562416	Gray	✗	M32x1,5	90	78	55	64.5	64.5	40	68	9	16	6.5	10
KFW M40x1,5	83562418	Gray	✗	M40x1,5	99	94	66	79.5	79.5	48.5	74.5	9.5	10	6.5	10
KFW M50x1,5	83562420	Gray	✗	M50x1,5	116	101	76	87.5	87.5	68.5	89.5	9.5	16	6.5	10
KFW 11	83561650	Black	✓	PG 11	49	47	35	29	37	22.5	27	11	4.5	4.3	10



Typ KFW

Article	Order No.	Color	UV	Internal thread	A mm	B mm	C mm	D mm	E mm	G mm	I mm	J mm	K mm	Ø mm	PU pcs.
KFW 16	83561652	Black	✓	PG 16	49	47	35	29	37	22.5	27	11	4.5	4.3	10
KFW 21	83561654	Black	✓	PG 21	69	65	44	41.5	51.5	30	42.5	15	6	6	10
KFW 29	83561656	Black	✓	PG 29	90	78	55	64.5	64.5	40	68	9	16	6.5	10
KFW 36	83561658	Black	✓	PG 36	99	94	66	79.5	79.5	48.5	74.5	9.5	10	6.5	10
KFW 48	83561660	Black	✓	PG 48	116	101	76	87.5	87.5	68.5	89.5	9.5	16	6.5	10
KFW 11	83561610	Gray	✗	PG 11	49	47	35	29	37	22.5	27	11	4.5	4.3	10
KFW 16	83561612	Gray	✗	PG 16	49	47	35	29	37	22.5	27	11	4.5	4.3	10
KFW 21	83561614	Gray	✗	PG 21	69	65	44	41.5	51.5	30	42.5	15	6	6	10
KFW 29	83561616	Gray	✗	PG 29	90	78	55	64.5	64.5	40	68	9	16	6.5	10
KFW 36	83561618	Gray	✗	PG 36	99	94	66	79.5	79.5	48.5	74.5	9.5	10	6.5	10
KFW 48	83561620	Gray	✗	PG 48	116	101	76	87.5	87.5	68.5	89.5	9.5	16	6.5	10

Material properties



Fitting: mod. polyamide PA 6
Moulded seal: Neoprene (CR) mod. polyamide PA 6
Neoprene (CR)

Thermal properties



Temperature / temperature range
-40 °C - 110 °C / short term: 140 °C

Protection class



Protection class
IP65

Fire properties



Fire classification
acc. to UL94: V0 self-extinguishing



Fire properties as per EN 45545-2
C.I.T. R22 / R23 HL3 :0,58 NF X 70-100-1/-2 600°C (1112 °F)
LOI R22 / R23 HL3 :≥ 32 % ISO 4589-2
Ds (max.) R22 / R23 HL3 :57 ISO 5659-2 (25 KW/m²)



Typ KFW

Fire properties



Fire properties as per NFPA

ASTM E 162
ASTM E 1354
ASTM E 662
Boeing BSS 7239
Boeing BSS 7242
Bombardier SMP 800-C

Chemical resistances



Resistant to:

Alcohol
Greases
Fuels
Mineral oils

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



EU railway approval



cURus approval

Classification

ETIM 9: EC001176
ECLASS 14: 27430312
UNSPSC 26.0801: 40183103

General information



Made in Germany

Recommended torques for
**murrplastik connectors, corrugated
conduits and cable fittings**



holders, lock nuts and reducers





Recommended torques for **murrplastik connectors, corrugated conduits and cable fittings, holders, lock nuts and reducers**

Fastening with lock nut

Metric thread EN 60423	Connecting thread and lock nut made of polyamide	Connection thread and lock nut made of metal
M12x1.5	2.0 Nm	5.0 Nm
M16x1.5	3.0 Nm	7.0 Nm
M20x1.5	4.0 Nm	8.0 Nm
M25x1.5	5.0 Nm	10.0 Nm
M32x1.5	6.0 Nm	12.0 Nm
M40x1.5	11.0 Nm	16.0 Nm
M50x1.5	15.0 Nm	17.0 Nm
M63x1.5	16.0 Nm	18.0 Nm

Pg thread DIN 40430	Connecting thread and lock nut made of polyamide	Connection thread and lock nut made of metal
Pg 7	2.0 Nm	4.0 Nm
Pg 9	2.5 Nm	4.0 Nm
Pg 11	3.5 Nm	6.0 Nm
Pg 13.5	4.0 Nm	7.0 Nm
Pg 16	4.5 Nm	8.0 Nm
Pg 21	7.5 Nm	10.0 Nm
Pg 29	9.0 Nm	13.0 Nm
Pg 36	14.0 Nm	15.0 Nm
Pg 42	15.0 Nm	16.0 Nm
Pg 48	16.0 Nm	17.0 Nm

Please note the following information:

- The specified tightening torques are maximum values and should not be exceeded.
- The values are based on measurements under normal climate conditions (23°C / 50% rel. humidity). During assembly and operation, the prevailing climatic conditions should also be taken into account, as these can affect the properties of the components.
- Please consider the properties of the other components with which the murrplastik elements are connected.
- Locking and sealing elements tightened with a lower torque provide better long-term strength.



Recommended torques for **Screws and nuts**

Torques for screws and nuts

Thread size	Torques
M4	2.0 Nm
M5	3.0 Nm
M6	4.0 Nm
M8	10.0 Nm
M10	15.0 Nm

Product examples from our webshop range



Series m-pro

on to the product

shop.murrplastik.de



Series m-fix

on to the product

shop.murrplastik.de



UHE Holder

on to the product

shop.murrplastik.de

More info at

shop.murrplastik.de



**Murrplastik
Systemtechnik GmbH**

Dieselstraße 10
71570 Oppenweiler
Germany

Phone: +49 7191 4820
info@murrplastik.de

Managing Directors:
Jürgen Zeltwanger (CEO)
Gerd Nothdurft (COO)

HRB 271053 Local court Stuttgart
VAT ID: DE 144 744 122



MP8902834212

23



0601HS

More info at

murrplastik.de