



Type MCKW (conduit and cable fitting)




Product information

The angled and folding MCKW 90° combined conduit and cable fittings with plastic threading and multi-insert are made from specially modified polyamide and perbunan. The materials are halogen, phosphor and cadmium-free.

The MCKW 90° conduit fittings feature the following advantages:

- No parts can get lost, delivered completely assembled
- Optimum strain relief for the cable due to iris-shaped lamellae
- Tightness of IP 65 for static and dynamic application
- Integrated clamping ring ensures high tear-out strength
- Folding angle piece makes cable assembly easy

Information, conformities and approvals

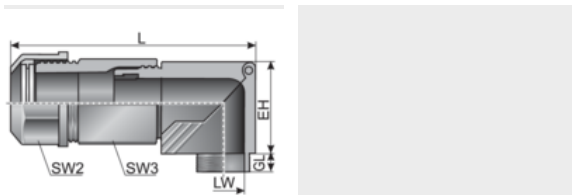

| Article | Order No. | Color | Connecting thread | Suitable for Murrflex | Number x Ø mm | EH mm | GL mm | SW 2 / 3 mm | PU pcs. |
|--------------------------------|-----------|-------|-------------------|-----------------------|---------------|-------|-------|-------------|---------|
| MCKW M16x1.5/9/4x1.4 1) | 83582650 | Black | M16x1,5 | M12/P09 | 4 x 1.4 | 27.5 | 7 | 22 | 50 |
| MCKW M16x1.5/9/2x3 1) | 83582656 | Black | M16x1,5 | M12/P09 | 2 x 3 | 27.5 | 7 | 22 | 50 |
| MCKW M20x1.5/16/3x2 1) | 83582658 | Black | M20x1,5 | M20/P16 | 3 x 2 | 32 | 10 | 27 | 50 |
| MCKW M20x1.5/16/3x3 1) | 83582662 | Black | M20x1,5 | M20/P16 | 3 x 3 | 32 | 10 | 27 | 50 |
| MCKW M20x1.5/16/6x3 1) | 83582664 | Black | M20x1,5 | M20/P16 | 6 x 3 | 32 | 10 | 27 | 50 |
| MCKW M20x1.5/16/3x4 1) | 83582666 | Black | M20x1,5 | M20/P16 | 3 x 4 | 32 | 10 | 27 | 50 |
| MCKW M20x1.5/16/2x5 1) | 83582668 | Black | M20x1,5 | M20/P16 | 2 x 5 | 32 | 10 | 27 | 50 |
| MCKW M25x1.5/21/4x5 1) | 83582670 | Black | M25x1,5 | M25/P21 | 4 x 5 | 39 | 11 | 33 | 50 |
| MCKW M25x1.5/21/3x7 1) | 83582672 | Black | M25x1,5 | M25/P21 | 3 x 7 | 39 | 11 | 33 | 50 |
| MCKW M25x1.5/21/2x8 1) | 83582674 | Black | M25x1,5 | M25/P21 | 2 x 8 | 39 | 11 | 33 | 50 |
| MCKW M25x1.5/21/4x6 1) | 83582676 | Black | M25x1,5 | M25/P21 | 4 x 6 | 39 | 11 | 33 | 50 |
| MCKW M32x1.5/29/6x6.5 1) | 83582678 | Black | M32x1,5 | M32/P29 | 6 x 6.5 | 50 | 11 | 42 | 25 |



Type MCKW (conduit and cable fitting)

| Article | Order No. | Color | Connecting thread | Suitable for Murrflex | Number x Ø mm | EH mm | GL mm | SW 2 / 3 mm | PU pcs. |
|---------------------------|-----------|-------|-------------------|-----------------------|---------------|-------|-------|-------------|---------|
| MCKW M32x1.5/29/4x9 1) | 83582680 | Black | M32x1,5 | M32/P29 | 4 x 9 | 50 | 11 | 42 | 25 |
| MCKW PG09 2 x 3 1) | 83582050 | Black | PG 09 | M12/P09 | 2 x 3 | 23 | 8 | 19 | 50 |
| MCKW PG09 4 x 1.4 1) | 83582052 | Black | PG 09 | M12/P09 | 4 x 1.4 | 23 | 8 | 19 | 50 |
| MCKW PG11 2 x 3 1) | 83582054 | Black | PG 11 | M16/P11 | 2 x 3 | 28 | 8 | 22 | 50 |
| MCKW PG11 2 x 4 1) | 83582056 | Black | PG 11 | M16/P11 | 2 x 4 | 28 | 8 | 22 | 50 |
| MCKW PG11 3 x 3 1) | 83582058 | Black | PG 11 | M16/P11 | 3 x 3 | 28 | 8 | 22 | 50 |
| MCKW PG16 2 x 6 1) | 83582068 | Black | PG 16 | M20/P16 | 2 x 6 | 37 | 11 | 27 | 50 |
| MCKW PG16 3 x 3 1) | 83582070 | Black | PG 16 | M20/P16 | 3 x 3 | 37 | 11 | 27 | 50 |
| MCKW PG16 3 x 4 1) | 83582072 | Black | PG 16 | M20/P16 | 3 x 4 | 37 | 11 | 27 | 50 |
| MCKW PG16 3 x 6 1) | 83582074 | Black | PG 16 | M20/P16 | 3 x 6 | 37 | 11 | 27 | 50 |
| MCKW PG16 4 x 4 1) | 83582076 | Black | PG 16 | M20/P16 | 4 x 4 | 37 | 11 | 27 | 50 |
| MCKW PG16 5 x 4 1) | 83582078 | Black | PG 16 | M20/P16 | 5 x 4 | 37 | 11 | 27 | 50 |
| MCKW PG16 6 x 4 1) | 83582080 | Black | PG 16 | M20/P16 | 6 x 4 | 37 | 11 | 27 | 50 |
| MCKW PG21 2 x 8 1) | 83582082 | Black | PG 21 | M25/P21 | 2 x 8 | 39 | 11 | 33 | 50 |
| MCKW PG21 3 x 7 1) | 83582084 | Black | PG 21 | M25/P21 | 3 x 7 | 39 | 11 | 33 | 50 |
| MCKW PG21 4 x 6 1) | 83582086 | Black | PG 21 | M25/P21 | 4 x 6 | 39 | 11 | 33 | 50 |
| MCKW PG29 6 x 6.5 1) | 83582088 | Black | PG 29 | M32/P29 | 6 x 6.5 | 50 | 12 | 42 | 25 |

1) No stock goods, delivery time and minimum order quantities upon request

Material properties



mod. polyamide PA 6 || Perbunan (NBR) ||

Thermal properties



Temperature / temperature range -40 °C – 110 °C / short term: 140 °C



Type MCKW (conduit and cable fitting)

Protection class



Protection class IP65

Fire properties



Fire classification acc. to UL94: V0 self-extinguishing

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

Classification



ETIM 9: EC001176 || eClass 14: 27430312 || UNSPSC: 40183103 ||

General information



Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.