



Strain relief type ZL-MF




Product information


The strain relief plate ZL-MF is based on the strain relief plate ZL. The pre-installed mounting feet enable simple, tool-free assembly on a 35mm top-hat rail (EN 50022). The feet are made of galvanized steel plate.

- Quick and easy to assemble and disassemble without the need for tools.
- Orderly routing of the cable
- Simple and effective strain relief through cable ties
- Approved for railway technology (EN 45545-2)

Information, conformities and approvals

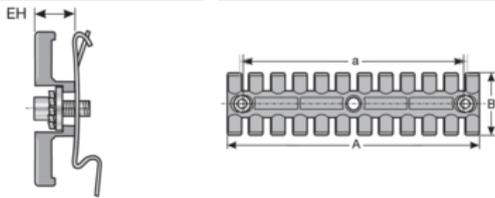

Article	Order No.	Color	No. Cables	PU pcs.
ZL-MF 39	87702610	Black	3	1
ZL-MF 70	87702614	Black	5	1
ZL-MF 140	87702622	Black	9	1

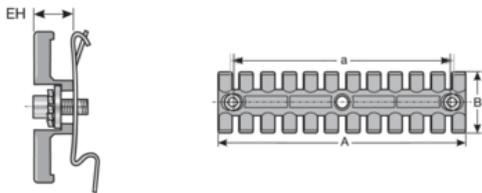

Article	Order No.	A mm	a mm	B mm	EH mm
ZL-MF 70	87702614	69.5	43.5	40	10
ZL-MF 140	87702622	139.5	121	40	10



Strain relief type ZL-MF

Material properties



Polyamide 6.6

Thermal properties



Temperature / temperature range

-45 °C - 125 °C

Fire properties



Fire classification

V0

Technical information



Halogen-free



LABS free



According to ISO 4892-2

Assembly method



Strain relief



Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



EU railway approval



Strain relief type ZL-MF

Classification

ETIM 9: EC000322
ECLASS 14: 27400604

General information



Made in Germany