




ECP-ECO continuous polyester label

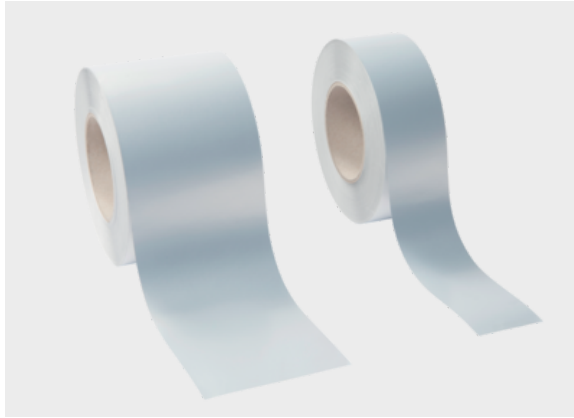


Product information

Continuous-feed polyester label for any number of labeling needs. Suitable for use in the automotive, electronics industries, logistics, machine and plant construction.

- Continuous-feed material makes the manufacturing of any length labels possible.
- Good adhesive properties for many surfaces.
- Cost-effective solution

Suitable for mp-TM series thermal transfer printers.

Information, conformities and approvals



Article	Order No.	Color	Sheet width mm	Roll length m	Recommended Colour ribbon	Software Article	PU pcs.
Continuous length roll materials							
ECP-ECO 50 - 100m	86511751	Silver	50	100	FB-TM 110 mm x 300 m	QK1	100
ECP-ECO 100 - 100m	86511750	Silver	100	100	FB-TM 110 mm x 300 m	QK0	100

Material properties



Polyester film

Adhesive properties



Modified acrylate adhesive; Minimum processing temperature of 5 °C

Thermal properties



Temperature / temperature range

-20 °C - 120 °C



ECP-ECO continuous polyester label

Technical information



Interior

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Primarily for inside use



Primarily for inside use

Labelling technology



Thermal transfer