




DM Rectangular with radius, 4x hole

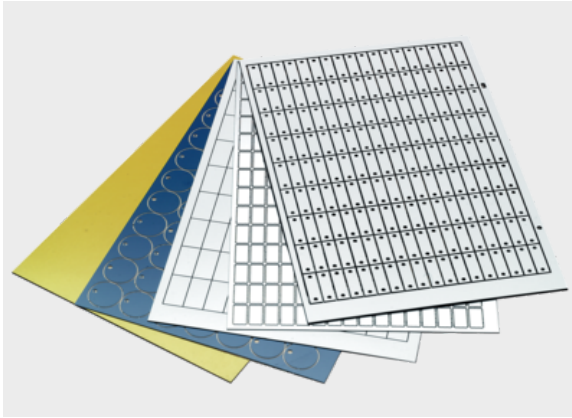

Product information

- Duomatt is a double-layer material with an UV resistant colored outer layer for marking with a Murrplastik engraving or plotter system.
- Available in various color combinations
- Three different carrier materials available
- Different geometries and holes
- UV resistant outer layer
- Material thickness 0.8 mm or 1.5 mm
- Other sizes available on request

Information, conformities and approvals

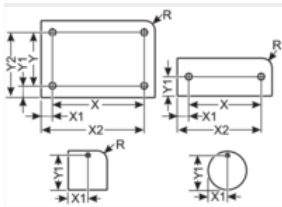


Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
Corner radius 2 mm; with adhesive foil								
DM 11x85 R2 HF, 4x3,0MM 1)	8601446004	White / Black	11 x 85	4x 3.0	0.8	50	M83	50
DM 11x85 R2 HF, 4x3,0MM 1)	8601446013	White / Black	11 x 85	4x 3.0	1.5	50	Z18	50
DM 120x20 R2 HF, 4x3,0MM 1)	8601446003	White / Black	120 x 20	4x 3.0	0.8	18	M82	18
DM 120x20 R2 HF, 4x3,0MM 1)	8601446012	White / Black	120 x 20	4x 3.0	1.5	18	Z17	18
DM 190x75 R2 HF, 4x3,0MM 1)	8601146002	White / Black	190 x 75	4x 3.0	0.8	2	DS7	2
DM 30x15 R2 HF, 4x2,0MM 1)	8601146019	White / Black	30 x 15	4x 2.0	0.8	99	D83	99
DM 30x15 R2 HF, 4x3,0MM 1)	8601146020	White / Black	30 x 15	4x 3.0	0.8	99	D90	99
DM 65x18 R2 HF, 4x3,0MM 1)	8601446002	Silver / Black	65 x 18	4x 3.0	1.5	40	L76	40
DM° 15x60 R2 HF, 4x3,0MM 1)	8601146000	White / Black	15 x 60	4x 3.0	0.8	51	B75	51
DM° 65x40 R2 HF, 4x3,0MM 1)	8601126007	White / Black	65 x 40	4x 3.0	0.8	16	DS9	16



DM Rectangular with radius, 4x hole

Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
Corner radius 2 mm; with self-adhesive foil								
DM 15x59 R2 SK, 4x3.0MM 1)	8601120013	White / Black	15 x 59	4x 3.0	0.8	51	447	51
DM 85x75 R2 SK, 4x2.2MM 1)	8601440001	Siemens silver / Black	85 x 75	4x 2.2	0.8	6	J53	6
DM 95x45 R2 SK, 4x2.2MM 1)	8601140000	Siemens silver / Black	95 x 45	4x 2.2	0.8	12	784	12
DM 95x93 R2 SK, 4x3.3MM 1)	8601140005	Silver / Black	95 x 93	4x 3.3	0.8	3	996	3
1) Other sizes available on request								
1) Other sizes available on request								



Article	Order No.	Drill hole pitch X mm	Drill hole pitch Y mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm	Drill hole position Y2 mm
DM 11x85 R2 HF, 4x3,0MM 1)	8601446004	4	78	3.5	3.5	7.5	81.5
DM 11x85 R2 HF, 4x3,0MM 1)	8601446013	4	78	3.5	3.5	7.5	81.5
DM 120x20 R2 HF, 4x3,0MM 1)	8601446003	112	12	4	4	116	16
DM 120x20 R2 HF, 4x3,0MM 1)	8601446012	112	12	4	4	116	16
DM 190x75 R2 HF, 4x3,0MM 1)	8601146002	181	66	4.5	4.5	185.5	70.5
DM 30x15 R2 HF, 4x2,0MM 1)	8601146019	24	11	3	2	27	13
DM 30x15 R2 HF, 4x3,0MM 1)	8601146020	24	9	3	3	27	12
DM 65x18 R2 HF, 4x3,0MM 1)	8601446002	56	9	4.5	4.5	60.5	13.5
DM° 15x60 R2 HF, 4x3,0MM 1)	8601146000	9	54	3	3	12	57
DM° 65x40 R2 HF, 4x3,0MM 1)	8601126007	56	31	4.5	4.5	60.5	35.5

Corner radius 2 mm; with self-adhesive foil



DM Rectangular with radius, 4x hole

Article	Order No.	Drill hole pitch X mm	Drill hole pitch Y mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm	Drill hole position Y2 mm
DM 15x59 R2 SK, 4x3.0MM 1)	8601120013	9	54	3	2.5	12	56.5
DM 85x75 R2 SK, 4x2.2MM 1)	8601440001	74	64	5.5	5.5	79.5	69.5
DM 95x45 R2 SK, 4x2.2MM 1)	8601140000	87	37	4	4	91	41
DM 95x93 R2 SK, 4x3.3MM 1)	8601140005	87	85	4	4	91	89

1) Other sizes available on request.

Adhesive properties



467
5016SK adhesive film with adhesive
SKS adhesive film with foam adhesive

Thermal properties



Temperature / temperature range
-30 °C - 80 °C

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Assembly method
00000001Label glued into place 0001Mounting the label with screws 0

Assembly method



Adhesive system



Screw system

Labelling technology



Plotter



Engraving

All data given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.