




## Cable entry system type KDL/D-mono



### Product information

- The round, splittable cable entry system for the feed-through of pre-assembled cables
- Easy assembly
- Integrated and split seal
- The split lock nut is included within the scope of delivery
- Easy strain relief with cable ties possible
- Protection class: IP 65 (with suitable grommets and cables)
- Thermal stability: -30 °C – +100 °C
- Fire classification: V0
- Material: Polyamide 6
- RoHS compliant
- UV resistant
- Suitable for standard cutouts M25, M32, M40 and M50
- Suitable grommets: KDT/X

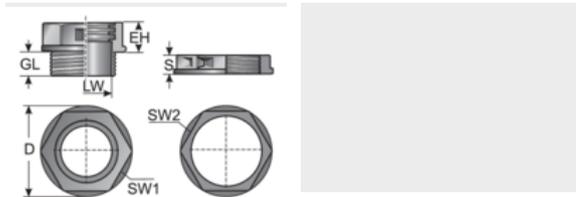

### Information, conformities and approvals



Article	Order No.	No. of openings small / medium / large	Diameter mm smallest / largest	Thread metric	PU pcs.
KDL/D-mono 1 M25	87141610	1 / 0 / 0	/	M25x1,5	5
KDL/D-mono 1 M32	87141620	0 / 1 / 0	/	M32x1,5	5
KDL/D-mono 1 M40	87141636	0 / 1 / 0	/	M40x1,5	5
KDL/D-mono 2 M40	87141630	2 / 0 / 0	/	M40x1,5	5
KDL/D-mono 1 M50	87141640	0 / 0 / 1	/	M50x1,5	5

Article	Order No.	Installation height (EH) mm	Thread length (GL) mm	Diameter (D) mm	Width across flats (SW1/ SW2) mm
KDL/D-mono 1 M32	87141620	18	15	50	46 / 36
KDL/D-mono 1 M40	87141636	18	20	62	55 / 46
KDL/D-mono 2 M40	87141630	18	20	62	55 / 46
KDL/D-mono 1 M50	87141640	22	20	62	55 / 55



## Cable entry system type KDL/D-mono

### Material properties



Polyamide 6

### Thermal properties



Temperature / temperature range

-30 °C - 100 °C

### Protection class



Protection class

IP65

### Fire properties



Fire classification

acc. to UL94: V0

### Technical information



Halogen-free



LABS free



According to ISO 4892-2

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



UL Type 12



cURus approval

### Classification

ETIM 9: EC002624  
ECLASS 14: 27182815



## Cable entry system type KDL/D-mono

### General information



Made in Germany