




ALM Rectangular without radius, 2x oblong hole

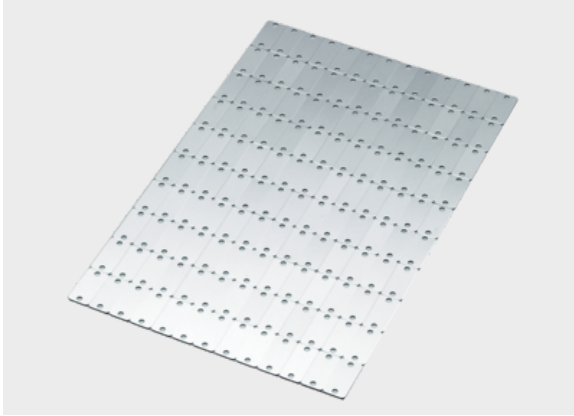

Product information

- Triple-layer material (aluminum-plastic-aluminum)
- Black plastic inner layer
- Outer layer in silver or gold
- Available with self-adhesive foil / adhesive foil
- Thickness: 1.5 mm
- Inscription technique: Engraving


ALUMATT products are high pressure decorative laminated sheets, preferably in plain colors. In contrast to standard laminates, Alumatt has a three-layer symmetrical structure of melamine resin impregnated cellulose sheeting. The color of all layers is exactly defined. The colors of both outer layers are usually in stark contrast to the core color. This color contrast makes the engraving very readable. For engraving, the outer layers are kept very thin. The layer thickness is approximately 0.08 mm. The plain papers are homogeneously colored in the mass. The color connection is secured with these paper qualities. The base is free of heavy metals and has a high level of light stability.



Information, conformities and approvals



Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
Without corner radius; with adhesive foil								
ALM 12x45 HF, 2x (3x5MM) 1)	8603226021	Silver / Black / Silver	12 x 45	2x (3,0x5,0)	1.5	100	H71	100
1) Other sizes available on request								
1) Other sizes available on request								



Article	Order No.	Drill hole pitch Y mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position Y2 mm
ALM 12x45 HF, 2x (3x5MM) 1)	8603226021	37	6	4	41

1) Other sizes available on request



ALM Rectangular without radius, 2x oblong hole

Material properties



Alumatt (ALM)

Adhesive properties



467SK adhesive film with adhesive

Thermal properties



Temperature / temperature range

-40 °C – 80 °C

Fire properties



Fire classification

B2

Classification

ETIM 9: EC001530

ECLASS 14: —

UNSPSC 26.0801: 39131504

General technical data



Assembly method

00000001Label glued into place 0001Mounting the label with screws 0

Assembly method



Adhesive system



Screw system

Labelling technology



Engraving

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.