





Cable entry system type KDL/S 24

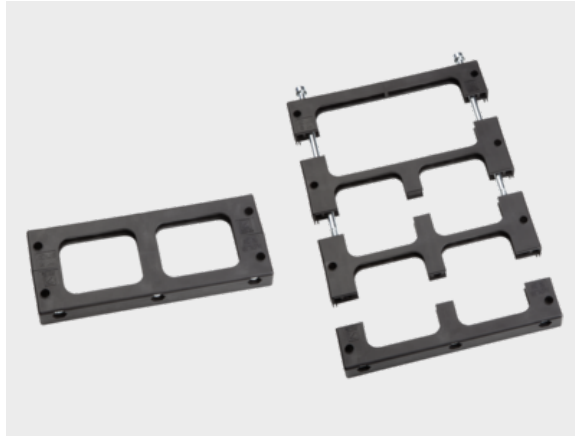

Product information


- The flexible special bar enables individual solutions for cables with and without connectors
- 2-piece, stackable frame
- Individual solutions are possible, a wide variety of cable types can be implemented
- Protection class: IP 54 (with suitable grommets and cables)
- Thermal stability: -40 °C – +80 °C
- Fire classification: V0
- Material: Polyamide 6.6
- RoHS compliant
- UV resistant
- Made in Germany
- Suitable for standard cut-outs for 24-pin industrial connectors
- Suitable grommets: KDT/S

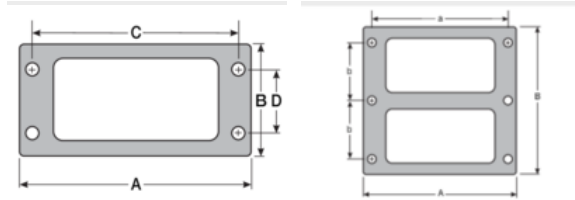

Information, conformities and approvals



Article	Order No.	Color	No. of openings	Cut-out	PU pcs.
KDL/S-G 24	87173032	Black		24-pole	1
KDL/S-G 24/2	87173036	Black		24-pole	1
KDL/S-G-K 24/3	87173038	Black		24-pole	1
KDL/S-K 24	87173030	Black		24-pole	1
KDL/S-K 24/4	87173034	Black		24-pole	1
KDL/S-K 24/6, sw	87173040	Black	6	24-pole	1

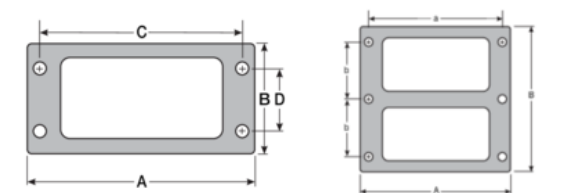

Article	Order No.	A mm	B mm	a mm	b mm
KDL/S-G 24/2	87173036	142	102	130	38
KDL/S-G-K 24/3	87173038	142	102	130	38



Cable entry system type KDL/S 24

Article	Order No.	A mm	B mm	a mm	b mm
KDL/S-K 24	87173030	142	58	130	32
KDL/S-K 24/4	87173034	142	102	130	38
KDL/S-K 24/6, sw	87173040	142	146	130	38

Material properties



Polyamide 6.6

Thermal properties



Temperature / temperature range

-40 °C - 80 °C

Fire properties



Fire classification

V0

Technical information



Halogen-free



LABS free



According to ISO 4892-2

Conformity



RoHS (EC Directive 2011/65/EU)

Classification

ETIM 9: EC002624
ECLASS 14: 27182815
UNSPSC 26.0801: 39121312

General information



Made in Germany



Cable entry system type KDL/S 24
