

Type plate-set TS



Product information


Type plate for marking installations, components, housings, and appliances. Additional protection with the transparent cover. Secure attachment with rivets or screw-mounting.

The thread/rivet diameter should be max. 3.5 mm, the head diameter max. 6.5 mm and the head height max. 2.0 mm.

Instead of the base carrier, you can also label the optional ELO insert and place it between the base carrier and cover.

- Complete set of KS base carrier and cover
- Cover with magnifying function TA
- Parts also available separately

Information, conformities and approvals

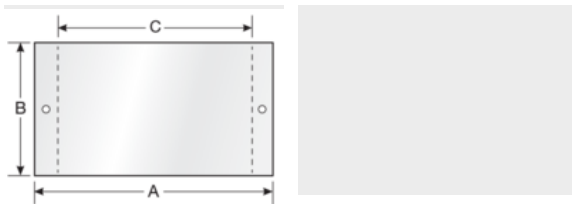

Article	Order No.	Color	Label size (A x B) mm	Sheet size mm	Printable area (C x B) mm	Base plate	Software Article	PU pcs.
---------	-----------	-------	--------------------------	------------------	---------------------------------	------------	---------------------	------------

Complete set, consisting of printable base carrier and transparent cover with magnifying function

TS 95x55 L	86464220	White / Transparent					601	10
TS 110x75 L	86464210	White / Transparent					600	10

Printable base carrier

KS 95x55 L 2x3,5 1)	86464222	White	95 x 55		75 x 55	GP1	601	20
KS 110x75 L 2x3,5 1)	86464212	White	110 x 75		95 x 75	GP1	600	20

Printable base carrier, self-adhesive

KSK 95x55 L 2x3,5	86464226	White	95 x 55		75 x 55	GP1	601	20
KSK 110x75 L 2x3,5	86464216	White	110 x 75		95 x 75	GP1	600	20

Transparent cover with magnifying function

TA 95x55 L	86464224	Transparent						10
TA 110x75 L	86464214	Transparent						10



Type plate-set TS

Article	Order No.	Color	Label size (A x B) mm	Sheet size mm	Printable area (C x B) mm	Base plate	Software Article	PU pcs.
---------	-----------	-------	-----------------------	---------------	---------------------------	------------	------------------	---------

Perforated ELO insert label, suitable for TS type plate set

ELO 95x55	86561263	Opaque		95 x 55	95 x 55		AAT	100
ELO 110x75	86561261	Opaque		110 x 75	110 x 75		AAS	40

1) GP1

1) GP1

Material properties



(KS label and transparent cover TA) Polycarbonate
(ELO label, perforated) Polyester film Polycarbonate
Polyester film

Adhesive properties



468Adhesive

Thermal properties



Temperature / temperature range
-40 °C - 130 °C

Fire properties



Fire classification
V0

Technical information



Halogen-free

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Printable KS base plates are halogen-free acc. to DIN/VDE 0472, Part 815



Type plate-set TS

General technical data



Printable KS base plates are halogen-free acc. to DIN/VDE 0472, Part 815

Assembly method



Adhesive system



Riveting system



Screw system

Labelling technology



Plotter



Laser



Laser printer



Inkjet

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.
The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.