




Conduit connection type KDP/H



Product information

The KDP/H conduit connection enables a connection to our Murrflex M50/P48 cable protection conduits with standard corrugation on the cable entry plates of Types KDP/N 24 and KDP/X 24. The conduit connection is comprised of a lower part that is screwed together with the cable entry plate and an upper part that engages with the lower part after the cables have been feed through the cable entry plate without tools.

- Line protection
- Contaminant water and water jet protection
- Easy assembly and disassembly
- compact design
- For all Murrflex conduits of sizes M50/P48 with standard corrugation

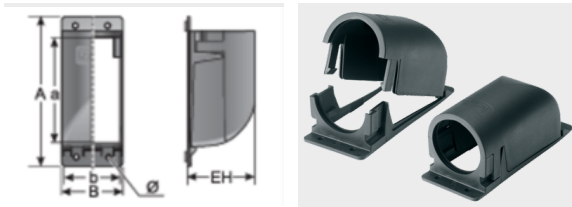

Information, conformities and approvals



Article	Order No.	Color	A mm	B mm	a mm	b mm	Ø mm	EH mm	PU pcs.
KDP/H 48	87301098	Black	148	60	53	106	5.5	65	1

Material properties



Polyamide 6

Thermal properties



Temperature / temperature range

-40 °C - 110 °C

Fire properties



Fire classification

V0

Conformity



RoHS (EC Directive 2011/65/EU)



Conduit connection type KDP/H

Classification

ETIM 9: EC001469
ECLASS 14: 27430308

General information



Made in Germany