




KM label holder (standard holder, variable length)

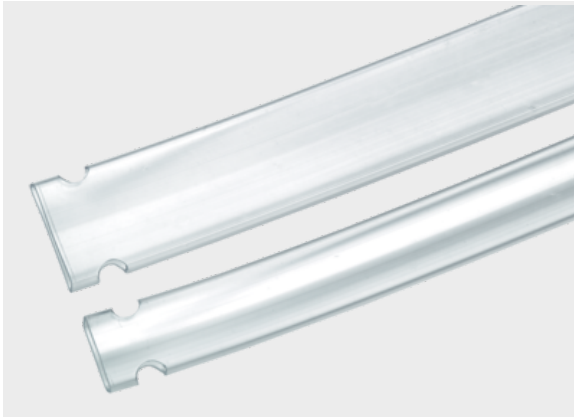


Product information

Individual label holders for labeling wires, cables and conduits. The KM variable length label holders can be cut to any length and are used to hold the KS and KSO label plates.

- Assembly with cable ties

The KM-T10 multi-purpose tool can be used to cut the label holders to convenient lengths (A) for specific purposes. The tool can process KM 9 and KM 15 materials without resetting. The ACS special function tool KM-T10 is listed in "accessories".

Information, conformities and approvals



Article	Order No.	Color	Length mm	Width (B) mm	Minimum diameter mm	Cable ties max. width mm	Recommended Label	PU pcs.
Labelling lengthwise to the cable/the conduit, one or more lines of print								
KM 9/10000	86321070	Transparent	10000	9	5	5	KSO 9/x	1
KM 15/10000	86321072	Transparent	10000	15	10	5	KS 15/x	1

Material properties



Polyvinyl chloride (PVC)

Thermal properties



Temperature / temperature range

-40 °C - 60 °C

Fire properties



Fire classification

V0



KM label holder (standard holder, variable length)

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

General technical data



Assembly method

0010000000000

Assembly method



Cable tie system with sleeves