




## Cable entry plate type KDP 24-Multi

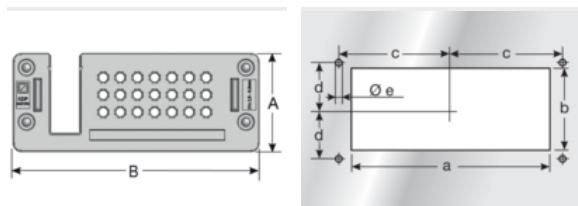


### Product information

- This snap-in cable entry plate is a combination of the KDP/N system and the KDL/E
- Frame is partially open at the top and can be fitted with 2 KDT/ZE grommets
- Very good strain relief
- Ideal if, in addition to cables without connectors, a few cables with connectors have to be fed into the control cabinet
- Up to eight pre-assembled cables can be placed in two grommets
- Approval: CSA
- Protection class: IP 54
- Thermal stability: -30 °C to +70 °C
- Material: Housing Polyamide / Seal: TPU/NBR/EPDM
- RoHS compliant
- UV resistant
- Made in Germany
- Suitable for standard cut-outs for 24-pin industrial connectors
- Assembly possible with catch hooks (sheet thickness 1.5 mm - 2.0 mm) or with M5 screws
- Catch hook for plate thickness 1.5 mm - 2.0 mm included with delivery, catch hooks for up to 4.1 mm plate thickness available

### Information, conformities and approvals



Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	No. Grommets	Cut-out	PU pcs.
KDP 24/10/02	87301076	Black	10	4x 3 mm - 6.5 mm 2x 4.5 mm - 8.5 mm 4x 8 mm - 12.5 mm	2	24-pole	1
KDP 24/14/02	87301078	Black	14	4x 2.5 mm - 5 mm 2x 3 mm - 6.5 mm 8x 4.5 mm - 8.5 mm	2	24-pole	1
KDP 24/15/02	87301080	Black	15	2x 1.5 mm - 3.5 mm 11x 3 mm - 6.5 mm 2x 8.5 mm - 12.5 mm	2	24-pole	1
KDP 24/17/02	87301082	Black	17	17x 3 mm - 6.5 mm	2	24-pole	1
KDP 24/20/02	87301084	Black	20	4x 1.5 mm - 3.5 mm 6x 3 mm - 5 mm 10x 3 mm - 6.5 mm	2	24-pole	1
KDP 24/21/02	87301086	Black	21	21x 2.5 mm - 5 mm	2	24-pole	1

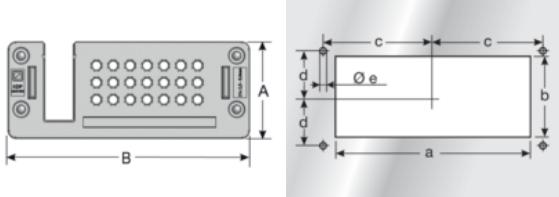



## Cable entry plate type KDP 24-Multi

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP 24/14/02	87301078	15.5	58	146	112	36	65	16	5.5
KDP 24/15/02	87301080	15.5	58	146	112	36	65	16	5.5
KDP 24/17/02	87301082	15.5	58	146	112	36	65	16	5.5
KDP 24/20/02	87301084	15.5	58	146	112	36	65	16	5.5
KDP 24/21/02	87301086	15.5	58	146	112	36	65	16	5.5

### Material properties



Housing: Polyamide  
Seal: TPU / NBR / EPDM Polyamide  
TPU / NBR / EPDM

### Thermal properties



Temperature / temperature range  
-30 °C - 70 °C

### Protection class



Protection class  
IP54

### Fire properties



Fire classification  
V0  
HB Frame:  
Block:

### Technical information



Halogen-free



LABS free



According to ISO 4892-2



## Cable entry plate type KDP 24-Multi

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



GL approval



CSA approval

### Classification

ETIM 9: EC002624  
ECLASS 14: 27182815  
UNSPSC 26.0801: 39121312

### General information



Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.