



ESK cable designation on stainless steel



Product information

Stainless steel labels for cable identification. Mounted with cable ties. The labels are applied to a plastic carrier and are suitable for labeling with a laser of the mp-LM line.


Special design for demanding environments like

- Chemical and petrochemical industry
- in the mining industry
- in the ship building industry
- in wind energy plants
- in the food industry


A suction and filter unit is absolutely necessary to comply with legal regulations on health protection.

One of the matching ESK base plates must be used for engraving on the mp-LM 1M.

Information, conformities and approvals

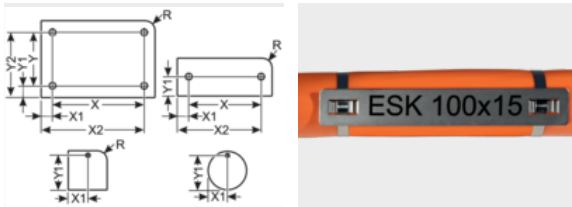

Article	Order No.	Color	Material thickness mm	Printable area mm	No. characters/lines	Number x Holes mm	Quantity per frame	Software Article	PU pcs.
ESK 80x9 L	8605190016	Stainless steel brushed	0.5	48 x 9	26 / 2	2x 3.5	10	L04	30
ESK 60x9 L	8605190015	Stainless steel brushed	0.5	28 x 9	15 / 2	2x 3.5	10	L05	30
ESK 100x9 L	8605190013	Stainless steel brushed	0.5	68 x 9	37 / 2	2x 3.5	10	L03	30
ESK 60x15 L	8605190012	Stainless steel brushed	0.5	28 x 15	15 / 4	2x 3.5	7	L02	21
ESK 80x15 L	8605190011	Stainless steel brushed	0.5	48 x 15	26 / 4	2x 3.5	7	L01	21
ESK 100x15 L	8605190010	Stainless steel brushed	0.5	68 x 15	37 / 4	2x 3.5	7	L00	21

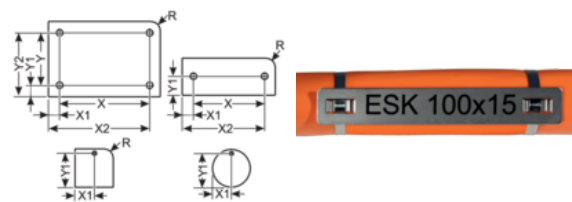



ESK cable designation on stainless steel

Article	Order No.	Outside radius R mm	Drill hole pitch X mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm	Drill hole position Y2 mm	Radius mm	Hole patterns
ESK 60x9 L	8605190015	2	40	10	4.5	50	4.5	2	2x 3.5
ESK 100x9 L	8605190013	2	80	10	4.5	90	4.5	2	2x 3.5
ESK 60x15 L	8605190012	2	40	10	7.5	50	7.5	2	2x 3.5
ESK 80x15 L	8605190011	2	60	10	7.5	70	7.5	2	2x 3.5
ESK 100x15 L	8605190010	2	80	10	7.5	90	7.5	2	2x 3.5

Material properties



V4A stainless steel

Thermal properties



Temperature / temperature range

-80 °C - 500 °C

Fire properties



Fire classification

V0

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

Assembly method



Cable tie system with plate

Labelling technology



Laser

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.