


Cable entry plate plastic type KDP/N 24

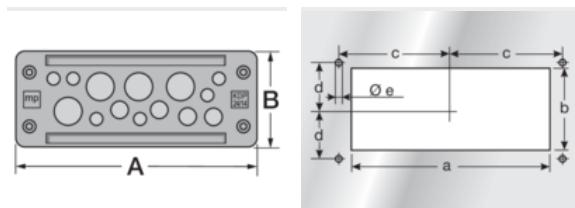

Product information

- Snap-in plastic cable entry plate with two elastomer plates
- Economical connection technology for tool-free wiring of equipment and machinery
- The alternative to cable fittings
- Very good strain relief
- Protection class: IP 65
- Thermal stability: -30 °C to +70 °C
- Material: Frame: Polyamide 6.6 / Seal: TPU/NBR/EPDM
- RoHS compliant
- UV resistant
- Made in Germany
- Suitable for standard cut-outs for 24-pin industrial connectors
- Assembly possible with catch hooks (sheet thickness 1.5 mm - 2.0 mm) or with M5 screws

Information, conformities and approvals




Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/N 24/10	87301108	Black	10	2x 3 mm - 6.5 mm 1x 5 mm - 9.2 mm 5x 9 mm - 14 mm 2x 14 mm - 20 mm	24-pole	1
KDP/N 24/11	87301110	Black	11	4x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 3x 14 mm - 20 mm	24-pole	1
KDP/N 24/12	87301120	Black	12	12x 8 mm - 12 mm	24-pole	1
KDP/N 24/13	87301130	Black	13	2x 3 mm - 5.5 mm 6x 4.1 mm - 8.1 mm 4x 9 mm - 14 mm 1x 14 mm - 20 mm	24-pole	1
KDP/N 24/14	87301140	Black	14	6x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 4x 9.6 mm - 15.9 mm	24-pole	1
KDP/N 24/17	87301150	Black	17	17x 5 mm - 9.2 mm	24-pole	1
KDP/N 24/17-1	87301151	Black	17	11x 3 mm - 6.5 mm 1x 4.1 mm - 8.1 mm 5x 8 mm - 12.5 mm	24-pole	1
KDP/N 24/22	87301160	Black	22	16x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 2x 8 mm - 12.5 mm	24-pole	1
KDP/N 24/22, PU 100	87301161	Black	22	16x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 2x 8 mm - 12.5 mm	24-pole	100
KDP/N 24/23	87301170	Black	23	23x 4.1 mm - 8.1 mm	24-pole	1
KDP/N 24/29	87301180	Black	29	29x 3 mm - 6.5 mm	24-pole	1
KDP/N 24/29, open, VE 100	87301182	Black	29	29x 3 mm - 6.5 mm	24-pole	100



Cable entry plate plastic type KDP/N 24

Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/N 24/80	87301190	Black	80	78x 1.5 mm - 2.6 mm 2x 2.5 mm - 5 mm	24-pole	1

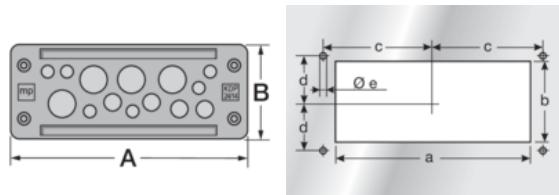

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/N 24/11	87301110	15	148	60	112	36	65	16	5.5
KDP/N 24/12	87301120	15	148	60	112	36	65	16	5.5
KDP/N 24/13	87301130	15	148	60	112	36	65	16	5.5
KDP/N 24/14	87301140	15	148	60	112	36	65	16	5.5
KDP/N 24/17	87301150	15	148	60	112	36	65	16	5.5
KDP/N 24/17-1	87301151	15	148	60	112	36	65	16	5.5
KDP/N 24/22	87301160	15	148	60	112	36	65	16	5.5
KDP/N 24/22, PU 100	87301161	15	148	60	112	36	65	16	5.5
KDP/N 24/23	87301170	15	148	60	112	36	65	16	5.5
KDP/N 24/29	87301180	15	148	60	112	36	65	16	5.5
KDP/N 24/29, open, VE 100	87301182	15	148	60	112	36	65	16	5.5
KDP/N 24/80	87301190	15	148	60	112	36	65	16	5.5

Material properties



Housing: Polyamide 6.6
Seal: TPU / NBR / EPDM Polyamide 6.6
TPU / NBR / EPDM

Thermal properties



Temperature / temperature range

-45 °C - 70 °C



Cable entry plate plastic type KDP/N 24

Protection class

	Protection class
	IP65

Fire properties

	Fire classification
	V0
	HB Frame:
	Block:

Technical information

	Halogen-free
	LABS free
	According to ISO 4892-2

Conformity

	RoHS (EC Directive 2011/65/EU)
--	--------------------------------

Approvals and operating permits

	GL approval
	UL Approvals

Classification

ETIM 9: EC002624
ECLASS 14: 27182815



Cable entry plate plastic type KDP/N 24

General information



Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.