



Type KFW/X




Product information

The KFW bulkhead fittings are made of specially modified polyamide 6. The material is self-extinguishing, and halogen, phosphor and cadmium-free. With the KFW/X bulkhead fittings, the cable protection conduits EWX with high corrugation can be directly mounted.

The KFW bulkhead fittings feature the following advantages:

- System divided in two for very quick and easy installation of cables
- Subsequent installation of cables is simplified by removable upper part
- Gasket included in delivery
- No extra fittings are required

Information, conformities and approvals

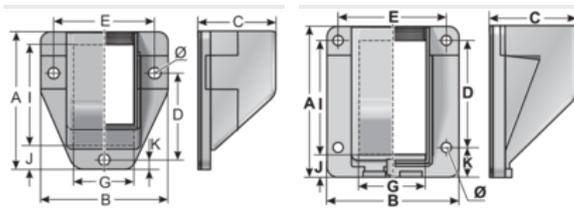

Article	Order No.	Color	UV	Suitable for Murrflex	A mm	B mm	C mm	D mm	E mm	G mm	I mm	J mm	K mm	Ø mm	PU pcs.
KFW/X M25/ P21	83562654	Black	✓	M25/P21	69	65	44	41.5	51.5	30	42.5	15	6	6	10
KFW/X M32/ P29	83562656	Black	✓	M32/P29	90	78	55	64.5	64.5	40	68	9	16	6.5	10
KFW/X M40/ P36	83562658	Black	✓	M40/P36	99	94	66	79.5	79.5	48.5	74.5	9.5	10	6.5	10
KFW/X M50/ P48	83562660	Black	✓	M50/P48	116	101	76	87.5	87.5	68.5	89.5	9.5	16	6.5	10
KFW/X M25/ P21 1)	83562614	Gray	✗	M25/P21	69	65	44	41.5	51.5	30	42.5	15	6	6	10
KFW/X M40/ P36 1)	83562618	Gray	✗	M40/P36	99	94	66	79.5	79.5	48.5	74.5	9.5	10	6.5	10
KFW/X M50/ P48 1)	83562620	Gray	✗	M50/P48	116	101	76	87.5	87.5	68.5	89.5	9.5	16	6.5	10

1) Discontinued product!

1) Discontinued product!

Material properties



Fitting: mod. polyamide PA 6
Moulded seal: Neoprene (CR) mod. polyamide PA 6
Neoprene (CR)



Type KFW/X

Thermal properties



Temperature / temperature range
-40 °C - 110 °C / short term: 140 °C

Protection class



Protection class
IP54

Fire properties



Fire classification
acc. to UL94: V0 self-extinguishing



Fire properties as per EN 45545-2
C.I.T. R22 / R23 HL3 :0,58 NF X 70-100-1/-2 600°C (1112 °F)
LOI R22 / R23 HL3 :≥ 32 % ISO 4589-2
Ds (max.) R22 / R23 HL3 :57 ISO 5659-2 (25 KW/m²)



Fire properties as per NFPA
ASTM E 162
ASTM E 1354
ASTM E 662
Boeing BSS 7239
Boeing BSS 7242
Bombardier SMP 800-C

Chemical resistances



Resistant to:
Alcohol
Greases
Fuels
Mineral oils

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



EU railway approval



Type KFW/X

Approvals and operating permits



cURus approval

Classification

ETIM 9: EC001176
ECLASS 14: 27430312
UNSPSC 26.0801: 40183103

General information



Made in Germany