



DM Rectangular without radius, 4x oblong hole

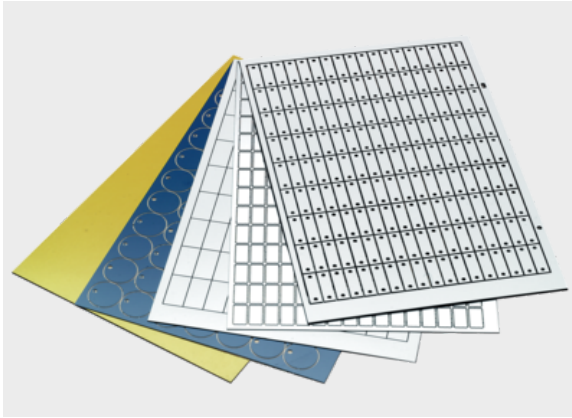

Product information

- Duomatt is a double-layer material with an UV resistant colored outer layer for marking with a Murrplastik engraving or plotter system.
- Available in various color combinations
- Three different carrier materials available
- Different geometries and holes
- UV resistant outer layer
- Material thickness 0.8 mm or 1.5 mm
- Other sizes available on request


Information, conformities and approvals



Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
Without corner radius; with adhesive foil								
DM 130x20 HF, 4x (6x3MM) 1)	8601246018	Blue / White	130 x 20	4x (6,0x3,0)	1.5	18	J47	18
DM 130x20 HF, 4x (6x3MM) 1)	8601246021	Green / White	130 x 20	4x (6,0x3,0)	1.5	18	J50	18
DM 130x20 HF, 4x (6x3MM) 1)	8601246020	Red / White	130 x 20	4x (6,0x3,0)	1.5	18	J49	18
DM 130x20 HF, 4x (6x3MM) 1)	8601246019	Black / White	130 x 20	4x (6,0x3,0)	1.5	18	J48	18
DM 40x12 HF, 4x (3x2MM) 1)	8601246005	Yellow / Black	40 x 12	4x (3,0x2,0)	1.5	105	119	105
Without corner radius; with self-adhesive foil								
DM 55x85 SK, 4x (4x2MM) 1)	8601220101	White / Black	55 x 85	4x (4,0x2,0)	1.5	10	65	10
1) Other sizes available on request								
1) Other sizes available on request								



DM Rectangular without radius, 4x oblong hole



Article	Order No.	Drill hole pitch X mm	Drill hole pitch Y mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm	Drill hole position Y2 mm
DM 130x20 HF, 4x (6x3MM) 1)	8601246018	118	11	6	4.5	124	15.5
DM 130x20 HF, 4x (6x3MM) 1)	8601246021	118	11	6	4.5	124	15.5
DM 130x20 HF, 4x (6x3MM) 1)	8601246020	118	11	6	4.5	124	15.5
DM 130x20 HF, 4x (6x3MM) 1)	8601246019	118	11	6	4.5	124	15.5
DM 40x12 HF, 4x (3x2MM) 1)	8601246005	33	6	3.5	3	36.5	9

Without corner radius; with self-adhesive foil

DM 55x85 SK, 4x (4x2MM) 1)	8601220101	43	65	6	10	49	75
----------------------------	------------	----	----	---	----	----	----

1) Other sizes available on request

Adhesive properties



467
5016SK adhesive film with adhesive
SKS adhesive film with foam adhesive

Thermal properties



Temperature / temperature range
-30 °C - 80 °C

Classification

ETIM 9: EC001530
ECLASS 14: –
UNSPSC 26.0801: 39131504

General technical data



Assembly method
00000001Label glued into place 0001Mounting the label with screws 0



DM Rectangular without radius, 4x oblong hole

Assembly method



Adhesive system



Screw system

Labelling technology



Plotter



Engraving