



Type VW 90° (metal thread)



Product information

The VW 90° conduit fittings are made of specially modified polyamide 6, thermoplastic elastomer and nickel-plated brass. The materials are halogen, phosphor and cadmium-free.


The VW 90° conduit fittings feature the following advantages:

- Quick assembly, insert conduit, screw upper part tight, done
- No parts can get lost, delivered completely assembled
- Resistant to vibration due to lockable cap nut
- Clamping along entire circumference, ensuring maximum tensile strength.
- High level of tightness at IP 68/69K to 6 bar without any add-on components to EN 60529

Specification:

- EN 45545-2 3x HL3
- NFPA 130: ASTM E 162, ASTM E 662
- ECE 324 R 118 Annex 6+8

Information, conformities and approvals

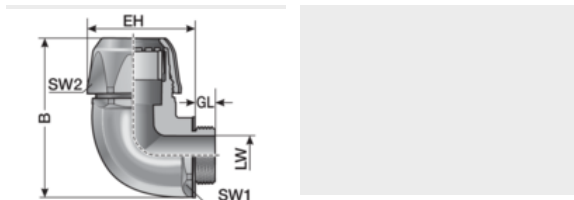

Article	Order No.	Color	UV	Connecting thread	Suitable for Murrflex	EH mm	GL mm	LW mm	B mm	SW 1 / 2 mm	PU pcs.
VW 90 M12-M 1)	83515252	Black	✓	M12x1,5	M12/P09	29	12	7.2	45	21 / 21	50
VW 90 M16-M 1)	83515254	Black	✓	M16x1,5	M16/P11	35	12	10.5	55	27 / 27	50
VW 90 M20-M 1)	83515256	Black	✓	M20x1,5	M20/P16	45	13	14.7	67	34 / 34	50
VW 90 M25-M 1)	83515258	Black	✓	M25x1,5	M25/P21	55	13	18.7	78	41 / 41	25
VW 90 M32-M 1)	83515260	Black	✓	M32x1,5	M32/P29	65	14	25.5	92	50 / 50	25
VW 90 M40-M 2)	83515262	Black	✓	M40x1,5	M40/P36	75	17	33	109	60 / 60	25
VW 90 M50-M 1)	83515264	Black	✓	M50x1,5	M50/P48	93	17	42	134	75 / 75	10
VW 90 M12-M 1) 1**)	83515212	Gray	✗	M12x1,5	M12/P09	29	12	7.2	45	21 / 21	50
VW 90 M16-M 1) 1**)	83515214	Gray	✗	M16x1,5	M16/P11	35	12	10.5	55	27 / 27	50
VW 90 M20-M 1)	83515216	Gray	✗	M20x1,5	M20/P16	45	13	14.7	67	34 / 34	50
VW 90 M25-M 1) 1**)	83515218	Gray	✗	M25x1,5	M25/P21	55	13	18.7	78	41 / 41	25
VW 90 M32-M 1)	83515220	Gray	✗	M32x1,5	M32/P29	65	14	25.5	92	50 / 50	25
VW 90 M40-M 2)	83515222	Gray	✗	M40x1,5	M40/P36	75	17	33	109	60 / 60	25



Type VW 90° (metal thread)

Article	Order No.	Color	UV	Connecting thread	Suitable for Murrflex	EH mm	GL mm	LW mm	B mm	SW 1 / 2 mm	PU pcs.
VW 90 M50-M 1) 1**)	83515224	Gray	✗	M50x1,5	M50/P48	93	17	42	134	75 / 75	10
VW 90 P09-M 1)	83515652	Black	✓	PG 09	M12/P09	29	12	7.2	45	21 / 21	50
VW 90 P11-M 1)	83515654	Black	✓	PG 11	M16/P11	35	12	10.5	55	27 / 27	50
VW 90 P16-M 1)	83515656	Black	✓	PG 16	M20/P16	45	13	14.7	67	34 / 34	50
VW 90 P21-M 1)	83515658	Black	✓	PG 21	M25/P21	55	14	18.7	78	41 / 41	25
VW 90 P29-M 1)	83515660	Black	✓	PG 29	M32/P29	65	14	25.5	92	50 / 50	25
VW 90 P36-M 2)	83515662	Black	✓	PG 36	M40/P36	75	17	33	109	60 / 60	25
VW 90 P48-M 1) 1**)	83515664	Black	✓	PG 48	M50/P48	93	17	42	134	75 / 75	10
VW 90 P09-M 1) 1**)	83515612	Gray	✗	PG 09	M12/P09	29	12	7.2	45	21 / 21	50
VW 90 P11-M 1) 1**)	83515614	Gray	✗	PG 11	M16/P11	35	12	10.5	55	27 / 27	50
VW 90 P16-M 1)	83515616	Gray	✗	PG 16	M20/P16	45	13	14.7	67	34 / 34	50
VW 90 P21-M 1) 1**)	83515618	Gray	✗	PG 21	M25/P21	55	14	18.7	78	41 / 41	25
VW 90 P29-M 1) 1**)	83515620	Gray	✗	PG 29	M32/P29	65	14	25.5	92	50 / 50	25
VW 90 P36-M 2) 1**)	83515622	Gray	✗	PG 36	M40/P36	75	17	33	109	60 / 60	25
VW 90 P48-M 1) 1**)	83515624	Gray	✗	PG 48	M50/P48	93	17	42	134	75 / 75	10
VW 90 N 3/8"-M 1) 1**)	83516050	Black	✓	3/8"	M16/P11	35	12	10.5	55	25 / 25	50
VW 90 N 1/2"-M 1)	83516052	Black	✓	1/2"	M20/P16	45	13	14.6	67	34 / 34	50
VW 90 N 3/4"-M 1) 1**)	83516054	Black	✓	3/4"	M25/P21	55	14	18.7	78	41 / 41	25
VW 90 N 1"-M 1) 1**)	83516056	Black	✓	1"	M32/P29	65	14	25.6	92	50 / 50	25
VW 90 N 1 1/4"-M 2) 1**)	83516058	Black	✓	1 1/4"	M40/P36	75	18	33.5	109	60 / 60	25
VW 90 N 2"-M 1) 1**)	83516060	Black	✓	2"	M50/P48	93	18	42	134	75 / 75	10
VW 90 N 3/8"-M 1) 1**)	83516010	Gray	✗	3/8"	M16/P11	35	12	10.5	55	25 / 25	50
VW 90 N 1/2"-M 1) 1**)	83516012	Gray	✗	1/2"	M20/P16	45	13	14.6	67	34 / 34	50
VW 90 N 3/4"-M 1) 1**)	83516014	Gray	✗	3/4"	M25/P21	55	14	18.7	78	41 / 41	25
VW 90 N 1"-M 1) 1**)	83516016	Gray	✗	1"	M32/P29	65	14	25.6	92	50 / 50	25



Type VW 90° (metal thread)

Article	Order No.	Color	UV	Connecting thread	Suitable for Murrflex	EH mm	GL mm	LW mm	B mm	SW 1 / 2 mm	PU pcs.
VW 90 N 1 1/4 -M 83516018 2) 1)**		Gray	✗	1 1/4"	M40/P36	75	18	33.5	109	60 / 60	25
VW 90 N 2"-M 83516020 1) 1)**		Gray	✗	2"	M50/P48	93	18	42	134	75 / 75	10

1) With cURus- approval
2) With CSA- and cURus- approval

1)** No stock goods, delivery time and minimum order quantities upon request

1) With cURus- approval
2) With CSA- and cURus- approval

1)** No stock goods, delivery time and minimum order quantities upon request

Material properties



Fitting: mod. polyamide PA 6
Connecting thread Brass nickel-plated mod. polyamide PA 6
Brass nickel-plated

Thermal properties



Temperature / temperature range
-40 °C - 110 °C / short term: 140 °C

Protection class



Protection class
IP68 up to 6 bar

Fire properties



Fire classification
acc. to UL94: V0 self-extinguishing



Fire properties as per EN 45545-2
C.I.T. R22 / R23 HL3 :0,58 NF X 70-100-1/-2 600°C (1112 °F)
LOI R22 / R23 HL3 :≥ 32 % ISO 4589-2
Ds (max.) R22 / R23 HL3 :57 ISO 5659-2 (25 KW/m²)



Fire properties as per NFPA
ASTM E 162
ASTM E 1354
ASTM E 662
Boeing BSS 7239
Boeing BSS 7242
Bombardier SMP 800-C



Type VW 90° (metal thread)

Fire properties



Smoke emission class

SR2 DIN 54837 / 5510-2



Flammability classification

S4 DIN 5510-2

Chemical resistances



Resistant to:

Alcohol

Greases

Fuels

Mineral oils

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)



ECE 324 R 118

Approvals and operating permits



EU railway approval



CSA approval



cURus approval

Classification

ETIM 9: EC001176

ECLASS 14: 27430312

UNSPSC 26.0801: 40183103

General information



Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.