




FB-BT and FB-ECO colour printer ribbon

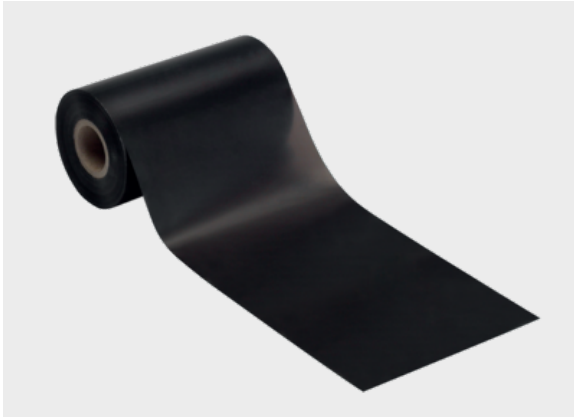

Product information

Color printer ribbons highly durable premium-quality resin for thermal transfer method printers of temp-TM Series

FB-BT printer ribbon

- Very good quality on smooth surfaces
- Excellent scratch resistance
- Good resistance to chemicals
- Good resistance to high temperatures
- For highest standards.

Recommended for "Rail technology, taped" (ST-BT-H) heat-shrink conduit.

FB-ECO printer ribbon

- Very good print quality for smooth surfaces
- Good scratch resistance
- Good resistance to chemicals
- Good resistance to high temperatures
- For the highest demands

Recommended for heat-shrink conduit "ECO taped" (ST-ECO) and "ECO continuous" (ST-ECO continuous).

Information, conformities and approvals



Article	Order No.	Color	Roll width mm	Roll length m	PU pcs.
FB-BT colour ribbon					
FB-BT colour printer ribbon - 40mm x 300m	86662002	Black	40	300	1
FB-BT colour printer ribbon - 80mm x 300m	86662001	Black	80	300	1

Classification

ETIM 9: EC001694
ECLASS 14: 19140690
UNSPSC 26.0801: 44103100

Labelling technology



Thermal transfer

All data given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.