


Strain relief type ZL-AH

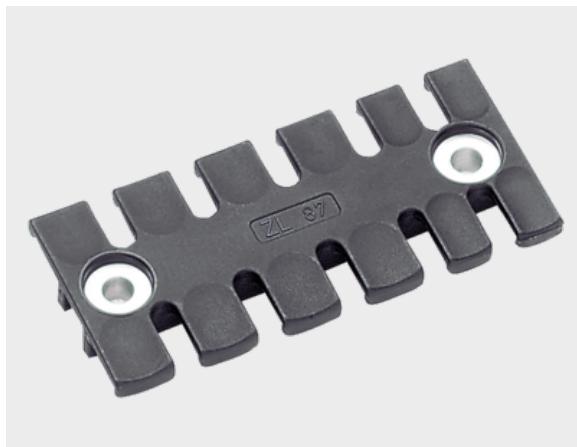


Product information

The ZL-AH strain relief plates are based on the ZL strain relief plate. By inserting the aluminum grommets, the ZL strain relief plate is free of fastening forces.

- Approved for railway technology (EN 45545-2 / NFPA 130)

Information, conformities and approvals

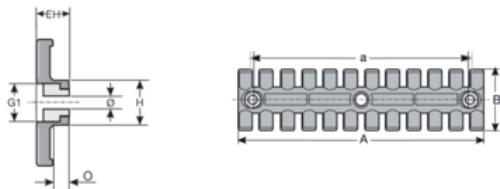


Article	Order No.	Color	No. Cables	PU pcs.
with aluminum grommets, assembly with M4 screws				
ZL-AH 39/4	87701255	Black	3	1
ZL-AH 60/4	87701256	Black	4	1
ZL-AH 87/4	87701257	Black	6	1
ZL-AH 103/4	87701258	Black	7	1
ZL-AH 121/4	87701259	Black	8	1
ZL-AH 140/4	87701260	Black	9	1
ZL-AH 180/4	87701261	Black	12	1
with aluminum sleeve, assembly with M5 screws				
ZL-AH 39	87701230	Black	3	1
ZL-AH 60	87701232	Black	4	1
ZL-AH 87	87701234	Black	6	1
ZL-AH 103	87701236	Black	7	1



Strain relief type ZL-AH

Article	Order No.	Color	No. Cables	PU pcs.
ZL-AH 121	87701238	Black	8	1
ZL-AH 140	87701240	Black	9	1
ZL-AH 180	87701242	Black	12	1
with aluminum grommets, assembly with M6 screws				
ZL-AH 39/6	87701262	Black	3	1
ZL-AH 60/6	87701263	Black	4	1
ZL-AH 87/6	87701264	Black	6	1
ZL-AH 103/6	87701265	Black	7	1
ZL-AH 121/6	87701266	Black	8	1
ZL-AH 140/6	87701267	Black	9	1
ZL-AH 180/6	87701268	Black	12	1

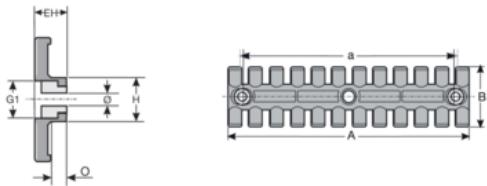

Article	Order No.	A mm	a mm	B mm	EH mm	G1 mm	H mm	O mm	Ø mm
ZL-AH 39/4	87701255	38.5	19.5	40	10	12	14	6	4.2
ZL-AH 60/4	87701256	59.5	43.5	40	10	12	14	6	4.2
ZL-AH 87/4	87701257	86.5	68	40	10	12	14	6	4.2
ZL-AH 103/4	87701258	102.5	84	40	10	12	14	6	4.2
ZL-AH 121/4	87701259	121	102.5	40	10	12	14	6	4.2
ZL-AH 140/4	87701260	139.5	121	40	10	12	14	6	4.2
ZL-AH 180/4	87701261	180	157	42	11.5	12	16	8.5	4.2

with aluminum sleeve, assembly with M5 screws



Strain relief type ZL-AH

Article	Order No.	A mm	a mm	B mm	EH mm	G1 mm	H mm	O mm	Ø mm
ZL-AH 39	87701230	38.5	19.5	40	10	12	14	6	5.5
ZL-AH 60	87701232	59.5	43.5	40	10	12	14	6	5.5
ZL-AH 87	87701234	86.5	68	40	10	12	14	6	5.5
ZL-AH 103	87701236	102.5	84	40	10	12	14	6	5.5
ZL-AH 121	87701238	121	102.5	40	10	12	14	6	5.5
ZL-AH 140	87701240	139.5	121	40	10	12	14	6	5.5
ZL-AH 180	87701242	180	157	42	11.5	12	16	8.5	5.5

with aluminum grommets, assembly with M6 screws

ZL-AH 39/6	87701262	38.5	19.5	40	10	12	14	6	6.5
ZL-AH 60/6	87701263	59.5	43.5	40	10	12	14	6	6.5
ZL-AH 87/6	87701264	86.5	68	40	10	12	14	6	6.5
ZL-AH 103/6	87701265	102.5	84	40	10	12	14	6	6.5
ZL-AH 121/6	87701266	121	102.5	40	10	12	14	6	6.5
ZL-AH 140/6	87701267	139.5	121	40	10	12	14	6	6.5
ZL-AH 180/6	87701268	180	157	42	11.5	12	16	8.5	6.5

Material properties

 Bar: Polyamide 6.6
Insert bushing: Aluminium Polyamide 6.6
Aluminium

Thermal properties

 Temperature / temperature range
-45 °C - 125 °C

Fire properties

 Fire classification
VO

 Fire properties as per EN 45545-2
C.I.T. R22 / R23 HL3 :0,44 EN 17084
Ds (max.) R22 / R23 HL3 :≥ 32 % ISO 4589-2



Strain relief type ZL-AH

Fire properties

LOI R22 / R23 HL3 :59 ISO 5659-2
Fire properties as per NFPA



yes

Technical information

HF	Halogen-free
LABS	LABS free
ISO 4892-2	According to ISO 4892-2

Assembly method



Strain relief



Conformity

RoHS	RoHS (EC Directive 2011/65/EU)
------	--------------------------------

Approvals and operating permits

EU	EU railway approval
----	---------------------

Classification

ETIM 9: EC000322
ECLASS 14: 27400604

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.