


FHS pivot bearing

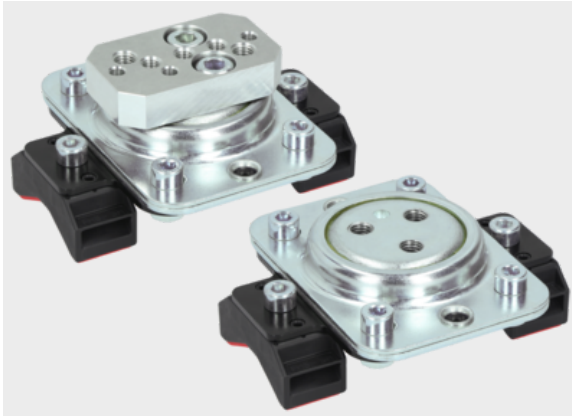

Product information

The FHS pivot bearings allow more freedom of movement for corrugated conduits. The FHS-DLM can be used to attach a trumpet (TRO 2.0 M50, NW70 and NW95) for the sliding guidance of corrugated conduits. The FHS-DZM enables the mounting of system holders, which is supplemented by a ball joint.

Accessories:

KMG/G - sliding channel guide

KMG/F - axial channel guide

TRO - Trumpet sliding guide

*The KKR-Fix or K KU-Fix hook-and-loop tape must be ordered separately. The FHS pivot bearings allow more freedom of movement for corrugated conduits.

Information, conformities and approvals



Article	Order No.	PU pcs.
FHS-DLM	83693450	1
FHS-DZM	83693451	1

Classification

ETIM 9: EC012003
ECLASS 14: 27439090
UNSPSC 26.0801: 40174500