





KDP cablequick® Type 149 (149x534 mm)

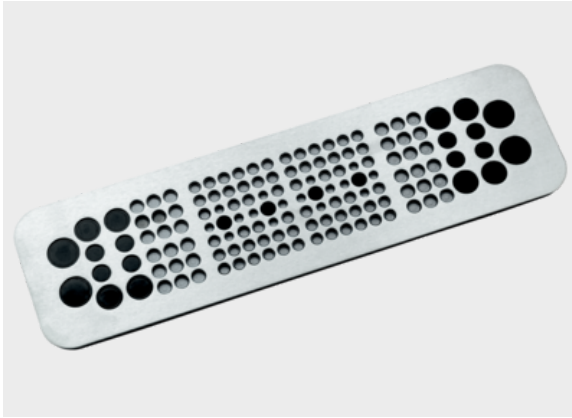

Product information

Efficient connection technology for terminal boxes, control cabinets for tool-free introduction of actuators, sensors, measuring and control instrumentation, optoelectronic, pneumatic lines and drive technology into a control panel. KDPs of product group 149 can be fitted directly into the standard cut-outs of Rittal cabinets. The stainless steel version is particularly suitable for application in the food and chemical areas. Integrated threaded bolts mean that no screws are visible from outside. Mounting set included in delivery.

- Aluminium & Stainless Steel are approved for railway technology (NFPA 130)
- V4A : 1.4571
- ALU : 3.3535
- ST : 1.0037
- Rittal cut-out 5

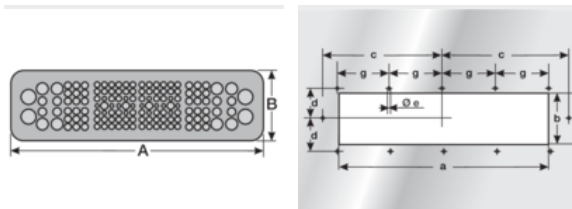


Information, conformities and approvals



Article	Order No.	Color	No. of openings	Openings Quantity x Ø mm	PU pcs.
KDP 149/140 ALU	87663095	Light gray	140	16x 3.5 mm - 6.2 mm 64x 4.5 mm - 8.5 mm 36x 6 mm - 10 mm 4x 8 mm - 12 mm 8x 9 mm - 14 mm 8x 14 mm - 18 mm 4x 18 mm - 25 mm	1
KDP 149/292 ALU	87663079	Light gray	292	250x 3.5 mm - 6.2 mm 32x 6 mm - 10 mm 8x 8 mm - 12 mm 2x 12 mm - 18 mm	1
KDP 149/46 ALU	87663064	Light gray	46	8x 6 mm - 10 mm 16x 10 mm - 14 mm 18x 12 mm - 18 mm 4x 18 mm - 25 mm	1
KDP 149/140 V4A	87663088	Grinded	140	16x 3.5 mm - 6.2 mm 64x 4.5 mm - 8.5 mm 36x 6 mm - 10 mm 4x 8 mm - 12 mm 8x 9 mm - 14 mm 8x 14 mm - 18 mm 4x 18 mm - 25 mm	1
KDP 149/292 V4A	87663066	Grinded	292	250x 3.5 mm - 6.2 mm 32x 6 mm - 10 mm 8x 8 mm - 12 mm 2x 12 mm - 18 mm	1



KDP cablequick® Type 149 (149x534 mm)

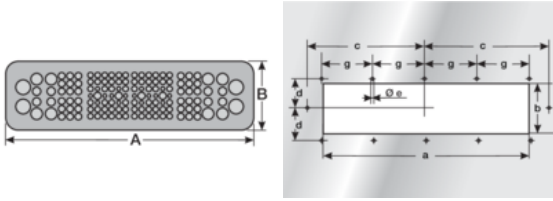

Article	Order No.	A mm	B mm	a mm	b mm	c mm	d mm	e mm	g mm
KDP 149/292 ALU	87663079	534	149	500	115	259	66.5	5	110
KDP 149/46 ALU	87663064	534	149	432	102	259	66.5	4	110
KDP 149/140 V4A	87663088	534	149	500	115	259	66.5	5	110
KDP 149/292 V4A	87663066	534	149	500	115	259	66.5	5	110

Material properties



Seal: NBR/EPDM NBR/EPDM

Thermal properties



Temperature / temperature range

-45 °C - 90 °C

Protection class



Protection class

IP65

Fire properties



Fire classification

HB Housing:
Seal:



Resistant to:

Alcohol
Greases
Fuels
Lyes
Mineral oils
Weak acids



KDP cablequick® Type 149 (149x534 mm)

Technical information



Halogen-free



LABS free



According to ISO 4892-2

Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



CSA approval



UR Certified

Classification

ETIM 9: EC002624
ECLASS 14: 27182815