




## LES Rectangular without radius

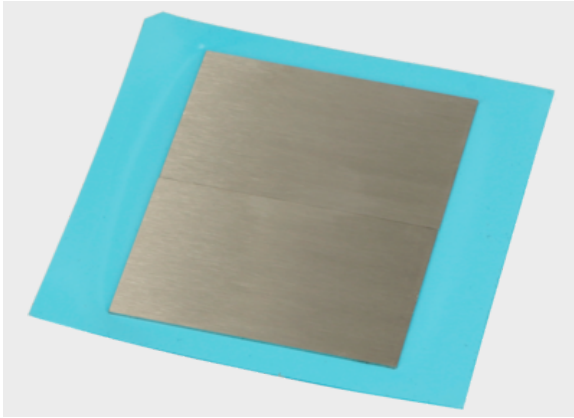

### Product information

Stainless steel labels made of V4A with a material thickness of 0.8 mm. Fastened with either rivets or screws.



Marking can only be done with a laser printer system (e.g. mp-LM\*, pulsar).

Special design for demanding environments like

- Chemical and petrochemical industry
- in the mining industry
- in the ship building industry
- in wind energy plants
- in the food industry

A suction and filter unit is absolutely necessary to comply with legal regulations on health protection.


### Information, conformities and approvals



Article	Order No.	Color	Material thickness mm	Printable area mm	No. characters/lines	Number x Holes mm	Quantity per frame	Software Article	PU pcs.
---------	-----------	-------	-----------------------	-------------------	----------------------	-------------------	--------------------	------------------	---------

#### Rectangular design

LES 40x30 HF 1)	8610340023	Silver	0.8				6	0H0	36
LES 80x50 HF 1)	8610340022	Silver	0.8				2	0G9	12
LES 95x95 HF 1)	8610340021	Silver	0.8				1	0G8	6
LES 85x25 HF, 2x2,0MM 1)	8610340017	Stainless steel brushed	0.8	75 x 25	41 / 7	2x 2.0	4	NX1	24
1) GP 120x120									
1) GP 120x120									





## LES Rectangular without radius

Article	Order No.	Drill hole pitch X mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm	Hole patterns	Adhesive
LES 80x50 HF 1)	8610340022						Adhesive foil
LES 95x95 HF 1)	8610340021						Adhesive foil
LES 85x25 HF, 2x2,0MM 1)	8610340017	79	3	12.5	82	2x 2.0	Adhesive foil

1) GP 120x120

### Material properties



V4A stainless steel

### Thermal properties



Temperature / temperature range

-80 °C - 500 °C

### Fire properties



Fire classification

V0

### Classification

ETIM 9: EC001288  
ECLASS 14: 27144009  
UNSPSC 26.0801: 39131504