



## Blanking plate (plastic)




### Product information


The blanking plates are suited for sealing cut-outs for 16- or 24-pole connectors.

- Integrated seal
- BP/N can be snap-fitted or screw-fastened
- BP/H snap-fit assembly

### Information, conformities and approvals

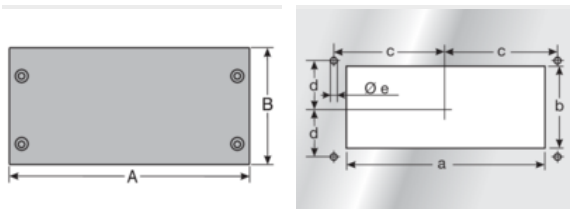

| Article   | Order No. | Color | Material Plate        | PU pcs. |
|---|-----------|-------|-----------------------|---------|
| <b>Reinforced version</b>                                     |           |       |                       |         |
| BP/G 16   | 87171630  | Black | mod. polyamide PA 6.6 | 10      |
| <b>High design, latchable from plate thickness 1.5-2.0 mm</b> |           |       |                       |         |
| BP/N 24   | 87171624  | Black |                       | 1       |
| <b>Flexible version</b>                                       |           |       |                       |         |
| BP/H 24   | 87171626  | Black |                       | 1       |

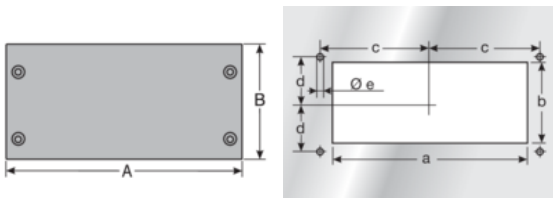

| Article | Order No. | Installation height mm | A mm | B mm | a mm | b mm | c mm | d mm | e mm |
|---------|-----------|------------------------|------|------|------|------|------|------|------|
| BP/G 16 | 87171630  | 8                      | 121  | 58   | 86   | 36   | 51.5 | 16   | 5.5  |



## Blanking plate (plastic)

| Article   | Order No. | Installation height mm | A mm | B mm | a mm | b mm | c mm | d mm | e mm |
|---|-----------|------------------------|------|------|------|------|------|------|------|
| <b>High design, latchable from plate thickness 1.5-2.0 mm</b> |           |                        |      |      |      |      |      |      |      |
| BP/N 24   | 87171624  | 15.5                   | 146  | 58   | 112  | 36   | 65   | 16   | 5.5  |
| <b>Flexible version</b>                                       |           |                        |      |      |      |      |      |      |      |
| BP/H 24   | 87171626  | 4.5                    | 146  | 48   | 112  | 36   | 65   | 16   | 5.5  |

### Material properties



BP/G, BP/N: Polyamide 6.6  
BP/H: Thermoplastic elastomer (TPE) Polyamide 6.6  
Thermoplastic elastomer (TPE)

### Thermal properties



Temperature / temperature range  
-40 °C - 125 °C

### Protection class



Protection class  
IP54 BP/G:  
IP65 BP/N:  
IP42 BP/H:

### Fire properties



Fire classification  
V0  
HB BP/G, BP/N:  
BP/H:

### Technical information



According to ISO 4892-2

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



GL approval



---

## Blanking plate (plastic)

---

### Classification

ETIM 9: EC002624  
ECLASS 14: 27182815  
UNSPSC 26.0801: 39121312

### General information



Made in Germany

---