



KSE label plate




Product information

The KSE label plates are pushed directly onto the single wires.

- Wire cross section from 0.25 - 1.5 mm²
- Available in two sizes
- Available in white

Information, conformities and approvals

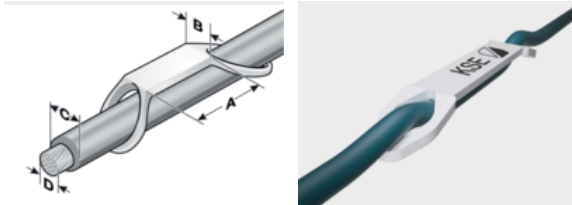

Article	Order No.	Color	RAL equiv.	Areas of application from - to in mm (C)	Wire cross section from - to mm ² (D)	Label size (A x B) mm	Printable area mm	Number of characters / lines	Quantity per frame	Software Article	Base plate	PU pcs.
---------	-----------	-------	------------	--	--	-----------------------	-------------------	------------------------------	--------------------	------------------	------------	---------

Usable label length 10 mm

KSE 4/10-0.75	86381010	White	9016	1.5 - 2.5	0.25 - 0.75	6 x 18	4 x 10	5 / 1	60	92	GRPD/10	1500
KSE 4/10-1.5	86381012	White	9016	2.5 - 3	0.75 - 1.5	6 x 18	4 x 10	5 / 1	60	93	GRPD/10	1500

Usable label length 18 mm

KSE 4/18-1.5	86381014	White	9016	2.5 - 3	0.75 - 1.5	6 x 26	4 x 18	10 / 1	40	94	GRPD/18	1000
--------------	----------	-------	------	---------	------------	--------	--------	--------	----	----	---------	------

Material properties



Polycarbonate (PC)



KSE label plate

Thermal properties



Temperature / temperature range

-40 °C - 130 °C

Fire properties



Fire classification

V0

Technical information



Halogen-free

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

General technical data



Assembly method

0100000000000

Assembly method



Direct labeling system

Labelling technology



Plotter



Laser



Inkjet