



Type SSG (conduit clamp)




Product information

The hose clamp type SSG is made of sheet steel. The surface is galvanized and partially coated with a halogen-free elastomer. The SSG are used for easy fixing or securing of cable protection conduits and distinguish themselves with the following advantages:

- Quick and easy assembly
- The elastomer cover prevents damage to the protective conduits
- Suitable for all cable protection conduits

Information, conformities and approvals

RoHS

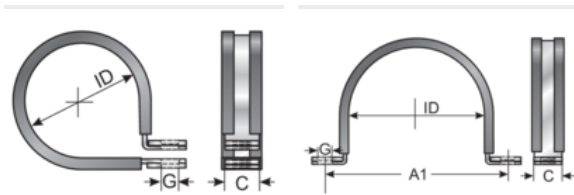

Article	Order No.	C	G	ID	A1	PU
		mm	mm	mm	mm	pcs.
SSG 06/M5	83723210	15	5.3	10		25
SSG 06/M6	83723211	18.5	6.4	10		25
1)						
SSG 07/M5	83723212	15	5.3	12		25
SSG 07/M6	83723213	18.5	6.4	12		25
SSG 09/M5	83723214	15	5.3	13		25
SSG 09/M6	83723215	18.5	6.4	13		25
SSG 11/M5	83723216	15	5.3	15		25
SSG 11/M6	83723217	18.5	6.4	15		25
SSG 13/M8	83723223	18.5	8.4	19		50
SSG 16/M5	83723218	15	5.3	21		25
SSG 16/M6	83723219	18.5	6.4	21		25
SSG 16/M8	83723221	18.5	8.4	21		50



Type SSG (conduit clamp)

Article	Order No.	C	G	ID	A1	PU
		mm	mm	mm	mm	pcs.
SSG 21/M6	83723222	18.5	6.4	28		25
SSG 21/M8	83723225	18.5	8.4	28		25
SSG 29/M6	83723224	18.5	6.4	34		25
SSG 36/M8	83723226	25	8.4	40		10
SSG 48/M6	83723228	18.5	6.4	54		10
SSG 70/M8	83723230	24.5	8.4	78	107	10
SSG 95/M8	83723232	24.5	8.4	105	134	10

1) No stock goods, delivery time and minimum order quantities upon request

Material properties



Galvanised sheet steel
EPDM

Thermal properties



Temperature / temperature range
-40 °C – 120 °C

Conformity



RoHS (EC Directive 2011/65/EU)

Classification



ETIM 9: EC000368
ECLASS 14: 27430315