Shielding clamp type SKS

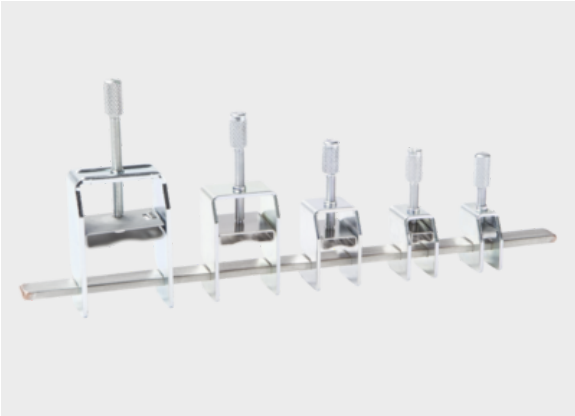

Product information

The shielding clamp may be used where the shield of individual cables must be connected with the ground potential. The SKS are mounted on a 10x3 busbar. The broad clamping range makes high contact output to the cable shield possible.

Information, conformities and approvals

Article	Order No.	Color	for shield of Ø mm	PU pcs.
SKS-EMV 2 - 5	87602010	Material color	2 - 5	10
SKS-EMV 3 - 8	87602012	Material color	3 - 8	10
SKS-EMV 3 - 14	87602014	Material color	3 - 14	10
SKS-EMV 3 - 20	87602016	Material color	3 - 20	10
SKS-EMV 5 - 28	87602018	Material color	5 - 28	10

Material properties

Galvanised sheet steel

Classification

ETIM 9: EC002623
ECLASS 14: 27182804

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.
The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.
A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.
All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.
They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.
Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.
Murrplastik accepts no liability for damage caused as a result of using our products.
Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.
Our General Terms and Conditions apply.