

KSR label plate




Product information

High-quality, halogen-free round label plate (PC circular blank) for subsequent labeling of cables, lines and conduits.

Fastened with either a cable tie or the S-hook.

Information, conformities and approvals

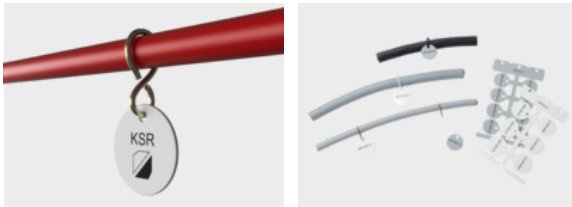

Article	Order No.	Color	RAL equiv.	Diameter mm	Quantity per frame	Number x Holes mm	Cable ties max. width mm	Software Article	Base plate	PU pcs.
Mounting hole 3.5 mm										
KSR D20-3,5	86411210	White	9016	20	8	1x 3.5	2.9	447	GP3	120
KSR D20-3,5	86411222	Gray	7038	20	8	1x 3.5	2.9	453	GP3	120
KSR D25-3,5	86411214	White	9016	25	8	1x 3.5	2.9	449	GP3	120
KSR D25-3,5	86411226	Gray	7038	25	8	1x 3.5	2.9	455	GP3	120
KSR D30-3,5	86411218	White	9016	30	6	1x 3.5	2.9	451	GP3	90
KSR D30-3,5	86411230	Gray	7038	30	6	1x 3.5	2.9	457	GP3	90
Mounting hole 4.2 mm										
KSR D20-4,2	86411212	White	9016	20	8	1x 4.2	3.6	448	GP3	120
KSR D20-4,2	86411224	Gray	7038	20	8	1x 4.2	3.6	454	GP3	120
KSR D25-4,2	86411216	White	9016	25	8	1x 4.2	3.6	450	GP3	120
KSR D25-4,2	86411228	Gray	7038	25	8	1x 4.2	3.6	456	GP3	120



KSR label plate

Article	Order No.	Color	RAL equiv.	Diameter mm	Quantity per frame	Number x Holes mm	Cable ties max. width mm	Software Article	Base plate	PU pcs.
KSR D30-4,2	86411220	White	9016	30	6	1x 4.2	3.6	452	GP3	90
KSR D30-4,2	86411232	Gray	7038	30	6	1x 4.2	3.6	458	GP3	90

Material properties



Polycarbonate (PC)

Thermal properties



Temperature / temperature range

-40 °C - 130 °C

Fire properties



Fire classification

V0

Technical information



Halogen-free

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

General technical data



Assembly method

0001000000000

Assembly method



Cable tie system with plate

Labelling technology



Plotter



KSR label plate

Labelling technology



Laser



Inkjet