



Type SB/SBF (spiral tape)

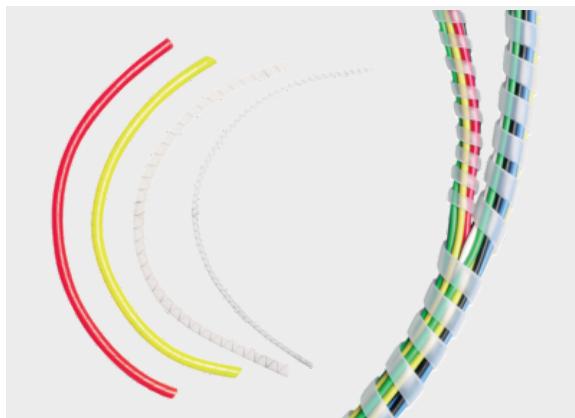

Product information

Spiral tapes are used to bundle cable harnesses efficiently and simply. The spiral tapes also protect the insulation of the wires. Branches of single wires or looms of cables may be made at any place. Bundling in the range from 2 - 100 mm is possible with just three sizes.

Type SBF consists of flame-retardant material.

Information, conformities and approvals



Article	Order No.	Color	Bundle range mm	inside mm	outside mm	Weight kg/100m	PU pcs.
SB 12	87621010	Natural color	2 - 12	1.5	3	0.4	50
SB 50	87621012	Natural color	5 - 50	4	6	1.5	100
SB 100	87621014	Natural color	12 - 100	9	12	4.8	50
SB 50	87621022	Black	5 - 50	4	6	1.5	100
SB 100	87621024	Black	12 - 100	9	12	1.5	50
SB 50	87621210	Yellow	5 - 50	4	6	1.5	100
SB 100	87621212	Yellow	12 - 100	9	12	2.8	50
SB 50	87621250	Orange	5 - 50	4	6	1.5	100
SB 100	87621252	Orange	12 - 100	9	12	2.8	50
SBF 12	87621050	White	2 - 10	1.5	3	0.3	50
SBF 50	87621052	White	5 - 40	4	6	1.4	25
SBF 100	87621054	White	11 - 55	9	12	4.8	25



Type SB/SBF (spiral tape)

Material properties

	mod. polyethylene
--	-------------------

Thermal properties

	Temperature / temperature range -10 °C - 40 °C / short term: 60 °C
--	---

Fire properties

	Fire classification acc. to UL94: HB acc. to UL94: V2 for Type SB only for Type SBF only
--	---

Technical information

	Halogen-free
--	--------------

Conformity

	RoHS (EC Directive 2011/65/EU)
--	--------------------------------

Classification

ETIM 9: EC002604 ECLASS 14: 27430302 UNSPSC 26.0801: 39131604

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.