



## Type USH/D




### Product information

The USH/D holder with rotating part is made of specially modified polycarbonate. The material is halogen, phosphor and cadmium-free. The holder with rotating part is used for quick and easy holding of Murrplastik EL, ELS and EVK cable protection conduits and features the following advantages:

- Various fastening possibilities
- Conduits can still be rotated
- Pre-assembly of lower part possible

### Information, conformities and approvals

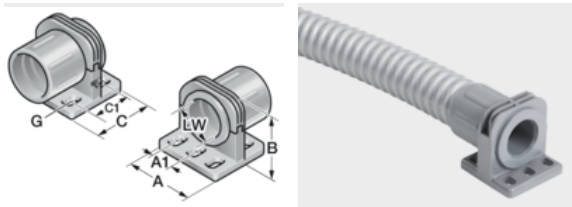


Article	Order No.	Color	A mm	B mm	C mm	A1 mm	C1 mm	PU pcs.
USH/D P16	83641210	Gray	38	40	38	13	23	50
USH/D P21	83641212	Gray	38	40	38	13	23	50
USH/D P29	83641214	Gray	46	48	38	17.5	26	50
USH/D P29	83641250	Black	46	48	38	17.5	26	50
USH/D P36	83641216	Gray	52	59	60	20	48	10
USH/D P48	83641218	Gray	68	77	60	27.5	47	10

### Material properties



Polycarbonate

### Thermal properties



Temperature / temperature range

-40 °C - 110 °C / short term: 140 °C



## Type USH/D

### Fire properties



Fire classification

acc. to UL94: V2 self-extinguishing

### Chemical resistances



Resistant to:

Weak acids  
Lyes  
Fuels  
Alcohol  
Mineral oils

### Technical information



Halogen-free

### Conformity



RoHS (EC Directive 2011/65/EU)

### Classification

ETIM 9: EC000368  
ECLASS 14: 27430315  
UNSPSC 26.0801: 31162814

Recommended torques for  
**murrplastik connectors, corrugated  
conduits and cable fittings**



**holders, lock nuts and reducers**





Recommended torques for  
**murrplastik connectors, corrugated conduits and cable fittings,  
holders, lock nuts and reducers**

**Fastening with lock nut**

<b>Metric thread EN 60423</b>	<b>Connecting thread and lock nut made of polyamide</b>	<b>Connection thread and lock nut made of metal</b>
M12x1.5	2.0 Nm	5.0 Nm
M16x1.5	3.0 Nm	7.0 Nm
M20x1.5	4.0 Nm	8.0 Nm
M25x1.5	5.0 Nm	10.0 Nm
M32x1.5	6.0 Nm	12.0 Nm
M40x1.5	11.0 Nm	16.0 Nm
M50x1.5	15.0 Nm	17.0 Nm
M63x1.5	16.0 Nm	18.0 Nm

<b>Pg thread DIN 40430</b>	<b>Connecting thread and lock nut made of polyamide</b>	<b>Connection thread and lock nut made of metal</b>
Pg 7	2.0 Nm	4.0 Nm
Pg 9	2.5 Nm	4.0 Nm
Pg 11	3.5 Nm	6.0 Nm
Pg 13.5	4.0 Nm	7.0 Nm
Pg 16	4.5 Nm	8.0 Nm
Pg 21	7.5 Nm	10.0 Nm
Pg 29	9.0 Nm	13.0 Nm
Pg 36	14.0 Nm	15.0 Nm
Pg 42	15.0 Nm	16.0 Nm
Pg 48	16.0 Nm	17.0 Nm

**Please note the following information:**

- The specified tightening torques are maximum values and should not be exceeded.
- The values are based on measurements under normal climate conditions (23°C / 50% rel. humidity). During assembly and operation, the prevailing climatic conditions should also be taken into account, as these can affect the properties of the components.
- Please consider the properties of the other components with which the murrplastik elements are connected.
- Locking and sealing elements tightened with a lower torque provide better long-term strength.



## Recommended torques for **Screws and nuts**

### Torques for screws and nuts

Thread size	Torques
M4	2.0 Nm
M5	3.0 Nm
M6	4.0 Nm
M8	10.0 Nm
M10	15.0 Nm

### Product examples from our webshop range



**Series m-pro**

on to the product

[shop.murrplastik.de](https://shop.murrplastik.de)



**Series m-fix**

on to the product

[shop.murrplastik.de](https://shop.murrplastik.de)



**UHE Holder**

on to the product

[shop.murrplastik.de](https://shop.murrplastik.de)

More info at

[shop.murrplastik.de](https://shop.murrplastik.de)



**Murrplastik  
Systemtechnik GmbH**

Dieselstraße 10  
71570 Oppenweiler  
Germany

Phone: +49 7191 4820  
info@murrplastik.de

Managing Directors:  
Jürgen Zeltwanger (CEO)  
Gerd Nothdurft (COO)

HRB 271053 Local court Stuttgart  
VAT ID: DE 144 744 122



MP8902834212

**23**



0601HS

More info at

[murrplastik.de](https://murrplastik.de)