





FB-TM colour ribbon

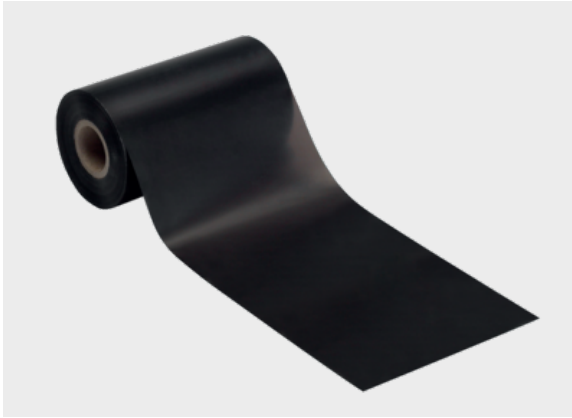

Product information

FB-TM label ribbon made of highly resistant premium resin quality for thermal transfer printers of the mp-TM series

- Perfect print quality
- DOR black: 1.7
- Superior abrasion and scratch resistance
- Highly resistant to solvents
- Outside use
- Salt-water proof
- Antistatic

Suitable for printing of
Alpha-numerical characters or Logos
All type of barcodes

Areas of application

- Electrical and mechanical engineering
- Automobile industry
- Packaging industry
- Pharmaceutical industry
- Food industry

Storage
12 months, 5 - 35 °C
20% - 80 % rel. humidity,

Certifications

- BGA
- BS 5609
- UL tested
- EC 98/638
- Ames test
- TSCA
- California Proposition 65
- CE 1999/45/EC
- CE 2001/59/EC

Recommended for inscribing the ECP Premium and ECP ECO labels and the KC* ECO series.

Information, conformities and approvals





FB-TM colour ribbon



FB-TM colour ribbon

Article	Order No.	Color	Roll width mm	Roll length m	PU pcs.
FB-TM label colour printer ribbon - 40mm x 300m	86662004	Black	40	300	1
FB-TM label colour printer ribbon - 110mm x 300m	86662003	Black	110	300	1

Technical information



Halogen-free

Classification

ETIM 9: EC001694
ECLASS 14: 19140690
UNSPSC 26.0801: 44103100

Labelling technology



Thermal transfer