




KNQ label plate

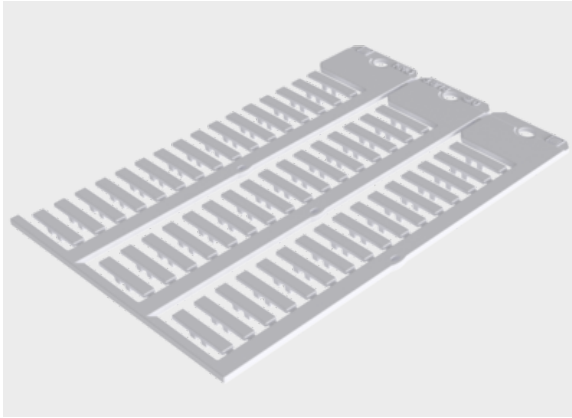


Product information

High-quality, halogen-free label for subsequent direct labeling of wires. The KNQ label can be clipped onto individually wired single wires by hand without loosening the connection and without tools.

Available in three sizes for wire cross-sections of 0.5 - 6 mm².

Information, conformities and approvals

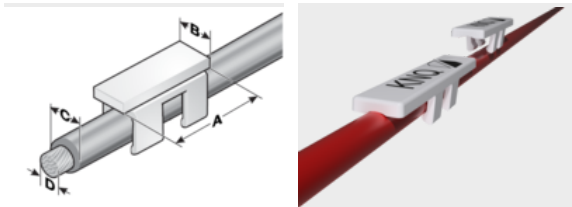

Article	Order No.	Color	RAL equiv.	Areas of application from - to in mm (C)	Wire cross section from - to mm ² (D)	Label size (A x B) mm	Printable area mm	Number of characters / lines	Quantity per frame	Software Article	Base plate	PU pcs.
---------	-----------	-------	------------	--	--	-----------------------	-------------------	------------------------------	--------------------	------------------	------------	---------

For cable diameters of 0.08 in - 0.12 in (2.0 mm - 2.6 mm)

KNQ 3.8/12-2.0	86381810	White	9016	2 - 2.6	0.5 - 0.75	3.8 x 12	3.8 x 12	6 / 1	48	400	GP30	720
KNQ 3.8/18-2.0	86381812	White	9016	2 - 2.6	0.5 - 0.75	3.8 x 18	3.8 x 18	10 / 1	48	401	GP30	720
KNQ 3.8/23-2.0	86381814	White	9016	2 - 2.6	0.5 - 0.75	3.8 x 23	3.8 x 23	12 / 1	48	402	GP30	720

For cable diameters of 0.08 in - 0.12 in (2.5 mm - 3.1 mm)

KNQ 3.8/12-2.5	86381820	White	9016	2.5 - 3.1	0.75 - 1.5	3.8 x 12	3.8 x 12	6 / 1	48	403	GP30	720
KNQ 3.8/18-2.5	86381822	White	9016	2.5 - 3.1	0.75 - 1.5	3.8 x 18	3.8 x 18	10 / 1	48	404	GP30	720
KNQ 3.8/23-2.5	86381824	White	9016	2.5 - 3.1	0.75 - 1.5	3.8 x 23	3.8 x 23	12 / 1	48	405	GP30	720

For cable diameters of 0.08 in - 0.12 in (3.0 mm - 3.6 mm)

KNQ 4.8/12-3.0	86381830	White	9016	3 - 3.6	1.5 - 2.5	4.8 x 12	4.8 x 12	6 / 1	48	406	GP30	720
KNQ 4.8/18-3.0	86381832	White	9016	3 - 3.6	1.5 - 2.5	4.8 x 18	4.8 x 18	10 / 1	48	407	GP30	720



KNQ label plate

Article	Order No.	Color	RAL equiv.	Areas of application from - to in mm (C)	Wire cross section from - to mm ² (D)	Label size (A x B) mm	Printable area mm	Number of characters / lines	Quantity per frame	Software Article	Base plate	PU pcs.
KNQ 4.8/23-3.0	86381834	White	9016	3 - 3.6	1.5 - 2.5	4.8 x 23	4.8 x 23	12 / 1	48	408	GP3Q	720

For cable diameters of 0.08 in - 0.12 in (3.5 mm - 4.3 mm)

KNQ 4.8/12-3.5	86381840	White	9016	3.5 - 4.3	2.5 - 4	4.8 x 12	4.8 x 12	6 / 1	48	409	GP3Q	720
KNQ 4.8/18-3.5	86381842	White	9016	3.5 - 4.3	2.5 - 4	4.8 x 18	4.8 x 18	10 / 1	48	410	GP3Q	720
KNQ 4.8/23-3.5	86381844	White	9016	3.5 - 4.3	2.5 - 4	4.8 x 23	4.8 x 23	12 / 1	48	411	GP3Q	720

For cable diameters of 0.08 in - 0.12 in (4.2 mm - 5.1 mm)

KNQ 5.5/12-4.2	86381850	White	9016	4.2 - 5.1	4 - 6	5.5 x 12	5.5 x 12	6 / 1	48	412	GP3Q	720
KNQ 5.5/18-4.2	86381852	White	9016	4.2 - 5.1	4 - 6	5.5 x 18	5.5 x 18	10 / 1	48	413	GP3Q	720
KNQ 5.5/23-4.2	86381854	White	9016	4.2 - 5.1	4 - 6	5.5 x 23	5.5 x 23	12 / 1	48	414	GP3Q	720

KNQ assembly tool

MW-KNQ 3,8	86381620	Red										1
MW-KNQ 4,8	86381622	Red										1
MW-KNQ 5,5	86381624	Red										1

Material properties



Polycarbonate (PC)

Thermal properties



Temperature / temperature range

-40 °C - 130 °C

Fire properties



Fire classification

V0



KNQ label plate

Technical information



Halogen-free

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

General technical data



Assembly method

0000010000000

Assembly method



Clamping system

Labelling technology



Plotter



Laser



Inkjet