



Cable entry plate plastic type KDP/F 24




Product information

Very flat plastic cable entry plate

Enormous time savings in assembly
High packing density
Large wire diameter ranges
Several cables may be fed through an opening together
no strain relief

Protection class: IP 65
Fire classification: HB
Thermal stability: -30 °C to +70 °C
Material: Frame: Polypropylene (PP) / Seal: TPE
RoHS compliant
UV resistant
Made in Germany

Suitable for standard cut-outs for 24-pin industrial connectors
Assembly with clips or M5 screws possible

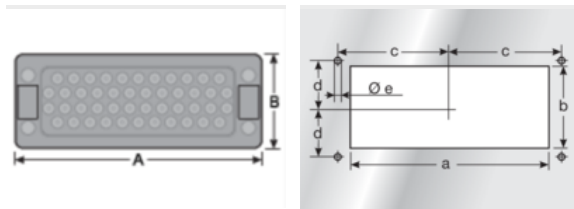

Information, conformities and approvals




Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/F 24-14	87302010	Black	14	6x 0 mm - 9 mm 4x 0 mm - 11 mm 4x 0 mm - 18 mm	24-pole	1
KDP/F 24-14, PU 100	87302011	Black	14	6x 0 mm - 9 mm 4x 0 mm - 11 mm 4x 0 mm - 18 mm	24-pole	100
KDP/F 24-22	87302020	Black	22	16x 0 mm - 9 mm 4x 0 mm - 11 mm 2x 0 mm - 15 mm	24-pole	1
KDP/F 24-22, PU 100	87302021	Black	22	16x 0 mm - 9 mm 4x 0 mm - 11 mm 2x 0 mm - 15 mm	24-pole	100
KDP/F 24-28	87302040	Black	28	28x 0 mm - 9 mm	24-pole	1
KDP/F 24-28, PU 100	87302041	Black	28	28x 0 mm - 9 mm	24-pole	100
KDP/F 24-46	87302050	Black	46	46x 0 mm - 6.5 mm	24-pole	1
KDP/F 24-46, PU 100	87302051	Black	46	46x 0 mm - 6.5 mm	24-pole	100



Cable entry plate plastic type KDP/F 24

Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/F 24-multi	87302030	Black	3	3x 0 mm - 27 mm	24-pole	1
KDP/F 24-multi, VE 100	87302031	Black	3	3x 0 mm - 27 mm	24-pole	100

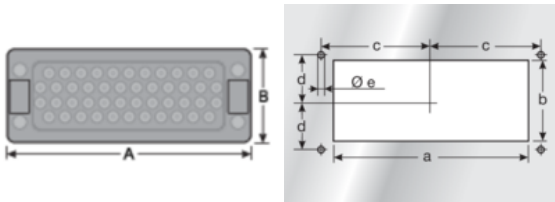

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/F 24-14, PU 100	87302011	10	148	60	112	36	65	16	5.5
KDP/F 24-22	87302020	10	148	60	112	36	65	16	5.5
KDP/F 24-22, PU 100	87302021	10	148	60	112	36	65	16	5.5
KDP/F 24-28	87302040	10	148	60	112	36	65	16	5.5
KDP/F 24-28, PU 100	87302041	10	148	60	112	36	65	16	5.5
KDP/F 24-46	87302050	10	148	60	112	36	65	16	5.5
KDP/F 24-46, PU 100	87302051	10	148	60	112	36	65	16	5.5
KDP/F 24-multi	87302030	10	148	60	112	36	65	16	5.5
KDP/F 24-multi, VE 100	87302031	10	148	60	112	36	65	16	5.5

Material properties



Frame: Polypropylene (PP)
Seal: Thermoplastic elastomer (TPE) Polypropylene (PP)
Thermoplastic elastomer (TPE)

Thermal properties



Temperature / temperature range
-45 °C - 70 °C / short term: °C



Cable entry plate plastic type KDP/F 24

Protection class



Protection class
IP65

Fire properties



Fire classification
HB

Technical information



Halogen-free



LABS free



According to ISO 4892-2

Conformity



RoHS (EC Directive 2011/65/EU)

Classification

ETIM 9: EC002624
ECLASS 14: 27182815
UNSPSC 26.0801: 39121312

General information



Made in Germany