




## Plastic cable entry plate plastic type KDP/X 24



### Product information

- Plastic cable entry plate with snap-in function and one instead of two elastomer plates
- Economical connection technology for tool-free wiring of equipment and machinery
- The alternative to cable fittings
- Very good strain relief
- Protection class: IP 65
- Thermal stability: -30 °C to +70 °C
- Material: Housing Polyamide 6.6 / Seal: TPU/EPDM
- RoHS compliant / UV resistant / Made in Germany
- Suitable for standard cut-outs for 24-pin industrial connectors
- Assembly possible with catch hooks (sheet thickness 1.5 mm - 2.0 mm) or with M5 screws

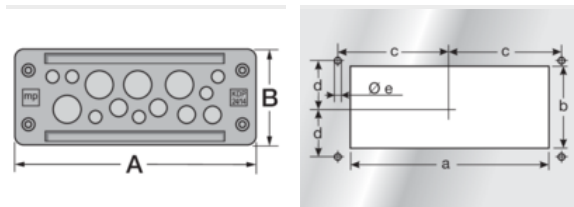

### Information, conformities and approvals




Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/X 24/3	87301301	Black	3	3x 19 mm - 26 mm	24-pole	1
KDP/X 24/10	87301305	Black	10	2x 3 mm - 6.5 mm 1x 5 mm - 9.2 mm 5x 9 mm - 14 mm 2x 14 mm - 20 mm	24-pole	1
KDP/X 24/11	87301315	Black	11	4x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 3x 14 mm - 20 mm	24-pole	1
KDP/X 24/12	87301325	Black	12	12x 8 mm - 12 mm	24-pole	1
KDP/X 24/13	87301335	Black	13	2x 3 mm - 5.5 mm 6x 4.1 mm - 8.1 mm 4x 9 mm - 14 mm 1x 14 mm - 20 mm	24-pole	1
KDP/X 24/14	87301345	Black	14	6x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 4x 9.6 mm - 15.9 mm	24-pole	1
KDP/X 24/17	87301355	Black	17	17x 5 mm - 9.2 mm	24-pole	1
KDP/X 24/17-1	87301356	Black	17	11x 3 mm - 6.5 mm 1x 4.1 mm - 8.1 mm 5x 8 mm - 12.5 mm	24-pole	1
KDP/X 24/17-1, VE 50, sw	87301357	Black	17	11x 3 mm - 6.5 mm 1x 4.1 mm - 8.1 mm 5x 8 mm - 12.5 mm	24-pole	50
KDP/X 24/19	87301398	Black	19	2x 3.5 mm - 6.5 mm 14x 5 mm - 9.2 mm 3x 7.5 mm - 11.5 mm	24-pole	1
KDP/X 24/22	87301365	Black	22	16x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 2x 8 mm - 12.5 mm	24-pole	1



## Plastic cable entry plate plastic type KDP/X 24

Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/X 24/22-1	87301399	Black	22	16x 3.5 mm – 6.5 mm 4x 7.5 mm – 11.5 mm 2x 9 mm – 14 mm	24-pole	1
KDP/X 24/23	87301375	Black	23	23x 4.1 mm – 8.1 mm	24-pole	1
KDP/X 24/23, VE 50, sw	87301171	Black	23	23x 4.1 mm – 8.1 mm	24-pole	50
KDP/X 24/29	87301385	Black	29	29x 3 mm – 6.5 mm	24-pole	1

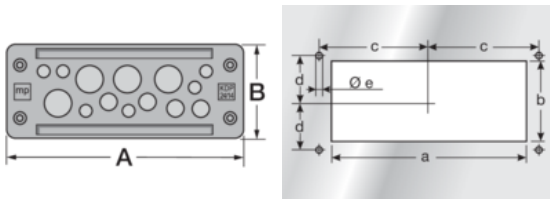

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/X 24/10	87301305	15	147	59	112	36	65	16	5.5
KDP/X 24/11	87301315	15	147	59	112	36	65	16	5.5
KDP/X 24/12	87301325	15	147	59	112	36	65	16	5.5
KDP/X 24/13	87301335	15	147	59	112	36	65	16	5.5
KDP/X 24/14	87301345	15	147	59	112	36	65	16	5.5
KDP/X 24/17	87301355	15	147	59	112	36	65	16	5.5
KDP/X 24/17-1	87301356	15	147	59	112	36	65	16	5.5
KDP/X 24/17-1, VE 50, sw	87301357	15	147	59	112	36	65	16	5.5
KDP/X 24/19	87301398	15	147	59	112	36	65	16	5.5
KDP/X 24/22	87301365	15	147	59	112	36	65	16	5.5
KDP/X 24/22-1	87301399	15	147	59	112	36	65	16	5.5
KDP/X 24/23	87301375	15	147	59	112	36	65	16	5.5
KDP/X 24/23, VE 50, 87301171 sw	15	147	59	112	36	65	16	5.5	
KDP/X 24/29	87301385	15	147	59	112	36	65	16	5.5



## Plastic cable entry plate plastic type KDP/X 24

### Material properties



Housing: Polyamide 6.6  
Seal: TPU / EPDM Polyamide 6.6  
TPU / EPDM

### Thermal properties



Temperature / temperature range  
-45 °C - 70 °C

### Protection class



Protection class  
IP65

### Fire properties



Fire classification  
V0  
HB Frame:  
Block:

### Technical information



Halogen-free



LABS free



According to ISO 4892-2

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



cURus approval



## Plastic cable entry plate plastic type KDP/X 24

### Classification

ETIM 9: EC002624  
ECLASS 14: 27182815  
UNSPSC 26.0801: 39121312

### General information



Made in Germany