


## Plastic cable entry plate plastic type KDP/X 24

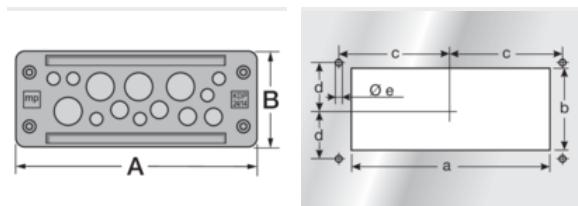

### Product information

- Plastic cable entry plate with snap-in function and one instead of two elastomer plates
- Economical connection technology for tool-free wiring of equipment and machinery
- The alternative to cable fittings
- Very good strain relief
- Protection class: IP 65
- Thermal stability: -30 °C to +70 °C
- Material: Housing Polyamide 6.6 / Seal: TPU/EPDM
- RoHS compliant / UV resistant / Made in Germany
- Suitable for standard cut-outs for 24-pin industrial connectors
- Assembly possible with catch hooks (sheet thickness 1.5 mm - 2.0 mm) or with M5 screws

### Information, conformities and approvals




Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/X 24/3	87301301	Black	3	3x 19 mm - 26 mm	24-pole	1
KDP/X 24/10	87301305	Black	10	2x 3 mm - 6.5 mm 1x 5 mm - 9.2 mm 5x 9 mm - 14 mm 2x 14 mm - 20 mm	24-pole	1
KDP/X 24/11	87301315	Black	11	4x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 3x 14 mm - 20 mm	24-pole	1
KDP/X 24/12	87301325	Black	12	12x 8 mm - 12 mm	24-pole	1
KDP/X 24/13	87301335	Black	13	2x 3 mm - 5.5 mm 6x 4.1 mm - 8.1 mm 4x 9 mm - 14 mm 1x 14 mm - 20 mm	24-pole	1
KDP/X 24/14	87301345	Black	14	6x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 4x 9.6 mm - 15.9 mm	24-pole	1
KDP/X 24/17	87301355	Black	17	17x 5 mm - 9.2 mm	24-pole	1
KDP/X 24/17-1	87301356	Black	17	11x 3 mm - 6.5 mm 1x 4.1 mm - 8.1 mm 5x 8 mm - 12.5 mm	24-pole	1
KDP/X 24/17-1, VE 50, sw	87301357	Black	17	11x 3 mm - 6.5 mm 1x 4.1 mm - 8.1 mm 5x 8 mm - 12.5 mm	24-pole	50
KDP/X 24/19	87301398	Black	19	2x 3.5 mm - 6.5 mm 14x 5 mm - 9.2 mm 3x 7.5 mm - 11.5 mm	24-pole	1
KDP/X 24/22	87301365	Black	22	16x 3 mm - 6.5 mm 4x 5 mm - 9.2 mm 2x 8 mm - 12.5 mm	24-pole	1



## Plastic cable entry plate plastic type KDP/X 24

Article	Order No.	Color	Total no. of openings	Openings Quantity x Ø mm	Cut-out	PU pcs.
KDP/X 24/22-1	87301399	Black	22	16x 3.5 mm - 6.5 mm 4x 7.5 mm - 11.5 mm 2x 9 mm - 14 mm	24-pole	1
KDP/X 24/23	87301375	Black	23	23x 4.1 mm - 8.1 mm	24-pole	1
KDP/X 24/23, VE 50, sw	87301171	Black	23	23x 4.1 mm - 8.1 mm	24-pole	50
KDP/X 24/29	87301385	Black	29	29x 3 mm - 6.5 mm	24-pole	1

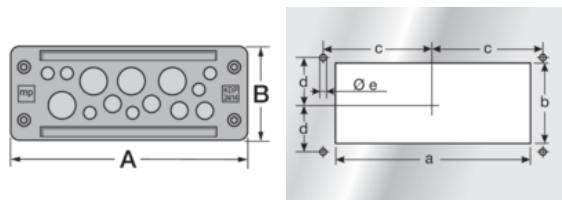

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
KDP/X 24/10	87301305	15	147	59	112	36	65	16	5.5
KDP/X 24/11	87301315	15	147	59	112	36	65	16	5.5
KDP/X 24/12	87301325	15	147	59	112	36	65	16	5.5
KDP/X 24/13	87301335	15	147	59	112	36	65	16	5.5
KDP/X 24/14	87301345	15	147	59	112	36	65	16	5.5
KDP/X 24/17	87301355	15	147	59	112	36	65	16	5.5
KDP/X 24/17-1	87301356	15	147	59	112	36	65	16	5.5
KDP/X 24/17-1, VE 50, sw	87301357	15	147	59	112	36	65	16	5.5
KDP/X 24/19	87301398	15	147	59	112	36	65	16	5.5
KDP/X 24/22	87301365	15	147	59	112	36	65	16	5.5
KDP/X 24/22-1	87301399	15	147	59	112	36	65	16	5.5
KDP/X 24/23	87301375	15	147	59	112	36	65	16	5.5
KDP/X 24/23, VE 50, 87301171	87301171	15	147	59	112	36	65	16	5.5
KDP/X 24/29	87301385	15	147	59	112	36	65	16	5.5



## Plastic cable entry plate plastic type KDP/X 24

### Material properties



Housing: Polyamide 6.6  
Seal: TPU / EPDM Polyamide 6.6  
TPU / EPDM

### Thermal properties



Temperature / temperature range  
-45 °C - 70 °C

### Protection class



Protection class  
IP65

### Fire properties



Fire classification  
V0  
HB Frame:  
Block:

### Technical information



Halogen-free



LABS free



According to ISO 4892-2

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



NEMA  
12



UL TYPE  
5



cURus approval



## Plastic cable entry plate plastic type KDP/X 24

### Classification

ETIM 9: EC002624  
ECLASS 14: 27182815  
UNSPSC 26.0801: 39121312

### General information



Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.