



DM Rectangular without radius, 4x centre punch

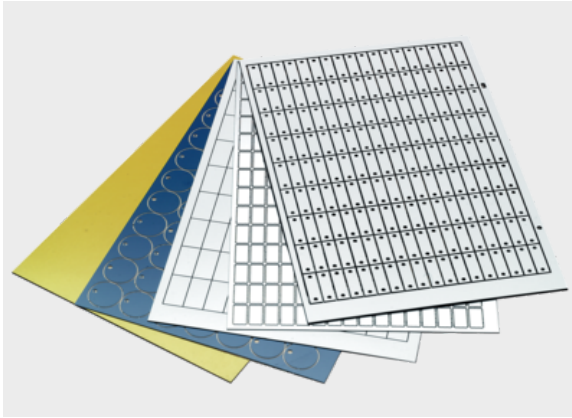

Product information

- Duomatt is a double-layer material with an UV resistant colored outer layer for marking with a Murrplastik engraving or plotter system.
- Available in various color combinations
- Three different carrier materials available
- Different geometries and holes
- UV resistant outer layer
- Material thickness 0.8 mm or 1.5 mm
- Other sizes available on request

Information, conformities and approvals



Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
Without corner radius; with high-strength adhesive foam foil								
DM 105x37 SKS, 4 centre punches 1)	8601292003	Siemens silver / Black	105 x 37	4x centre punch	0.8	10	365	10
DM 105x74 SKS, 4 centre punches 1)	8601292002	Siemens silver / Black	105 x 74	4x centre punch	0.8	4	369	4
DM 55x160 SKS, 4 centre punches 1)	8601292001	Siemens silver / Black	55 x 160	4x centre punch	0.8	5	338	5
DM 55x60 SKS, 4 centre punches 1)	8601292000	Siemens silver / Black	55 x 60	4x centre punch	0.8	15	337	15
Without corner radius; with self-adhesive foil								
DM 114x75 SK, 4 centre punches 2)	8601200425	Siemens silver / Black	114 x 75	4x centre punch	0.8	4	5B	4
DM 114x75 SK, 4 centre punches 2)	8601200430	White / Black	114 x 75	4x centre punch	0.8	4	6P	4
DM 142x75 SK, 4 centre punches 2)	8601200424	Siemens silver / Black	142 x 75	4x centre punch	0.8	4	5A	4
DM 142x75 SK, 4 centre punches 2)	8601200295	Silver / Black	142 x 75	4x centre punch	0.8	4	672	4
DM 142x75 SK, 4 centre punches 2)	8601200429	White / Black	142 x 75	4x centre punch	0.8	4	60	4
DM 65x76 SK, 4 centre punches	8601290007	White / Black	65 x 76	4x centre punch	0.8	8	330	8




DM Rectangular without radius, 4x centre punch

Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
---------	-----------	-------	---------------	-------------------	-----------------------	------------------	------------------	---------

2)
1) Due to the adhesive properties of the SKS film, it can happen that the manufactured signs stick together again after processing and have to be trimmed.
2) Other sizes available on request

1) Due to the adhesive properties of the SKS film, it can happen that the manufactured signs stick together again after processing and have to be trimmed.
2) Other sizes available on request



Article	Order No.	Drill hole pitch X mm	Drill hole pitch Y mm	Drill hole position X1 mm	Drill hole position Y1 mm	Drill hole position X2 mm	Drill hole position Y2 mm
DM 105x37 SKS, 4 centre punches 1)	8601292003	95	27	5	5	100	32
DM 105x74 SKS, 4 centre punches 1)	8601292002	95	64	5	5	100	69
DM 55x160 SKS, 4 centre punches 1)	8601292001	49	154	3	3	52	157
DM 55x60 SKS, 4 centre punches 1)	8601292000	49	54	3	3	52	57

Without corner radius; with self-adhesive foil

DM 114x75 SK, 4 centre punches 2)	8601200425	106	67	4	4	110	71
DM 114x75 SK, 4 centre punches 2)	8601200430	106	67	4	4	110	71
DM 142x75 SK, 4 centre punches 2)	8601200424	134	67	4	4	138	71
DM 142x75 SK, 4 centre punches 2)	8601200295	134	67	4	4	138	71
DM 142x75 SK, 4 centre punches 2)	8601200429	134	67	4	4	138	71
DM 65x76 SK, 4 centre punches 2)	8601290007	58	69	3.5	3.5	61.5	72.5

1) Due to the adhesive properties of the SKS film, it can happen that the manufactured signs stick together again after processing and have to be trimmed.
2) Other sizes available on request

Adhesive properties



467
5016SK adhesive film with adhesive
SKS adhesive film with foam adhesive



DM Rectangular without radius, 4x centre punch

Thermal properties



Temperature / temperature range

-30 °C - 80 °C

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Assembly method

00000001Label glued into place 0001Mounting the label with screws 0

Assembly method



Adhesive system



Screw system

Labelling technology



Plotter



Engraving