



FL-EF




Product information

The FL-EF flange connection is made of specially modified polyamide 6. The material is halogen, phosphor and cadmium-free. The connection can be used only for the rectangular conduit Type EF and features the following unique advantages:

- Flat construction
- Split
- Quick and easy assembly with a sliding lock

Information, conformities and approvals

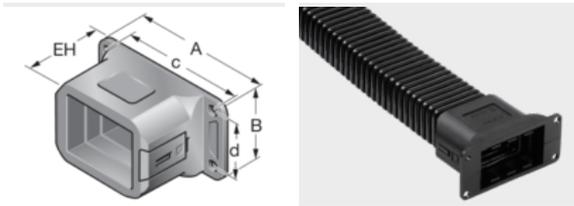

Article	Order No.	Color	UV	Suitable for Energoflex EF	A mm	B mm	c mm	d mm	EH mm	PU pcs.
FL-EF 26042	83361018	Black	✓	26042	93	42	83	32	54	1

Material properties



mod. polyamide PA 6

Thermal properties



Temperature / temperature range

-30 °C - 110 °C / short term: 200 °C

Protection class



Protection class

IP42

Fire properties



Fire classification



FL-EF

Fire properties

| acc. to UL94: HB

Chemical resistances



Resistant to:

Weak acids
Lyes
Fuels
Alcohol
Mineral oils

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

General information



Made in Germany