

FL-EF




Product information

The FL-EF flange connection is made of specially modified polyamide 6. The material is halogen, phosphor and cadmium-free. The connection can be used only for the rectangular conduit Type EF and features the following unique advantages:

- Flat construction
- Split
- Quick and easy assembly with a sliding lock

Information, conformities and approvals

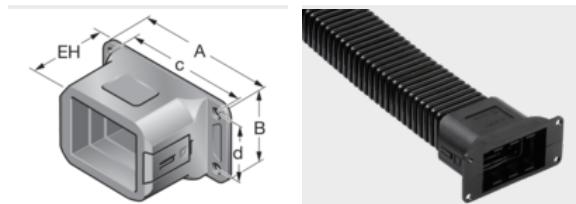

Article	Order No.	Color	UV	Suitable for Energoflex EF	A mm	B mm	C mm	d mm	EH mm	PU pcs.
FL-EF 26042	83361018	Black	✓	26042	93	42	83	32	54	1

Material properties



mod. polyamide PA 6

Thermal properties



Temperature / temperature range

-30 °C - 110 °C / short term: 200 °C

Protection class



Protection class

IP42

Fire properties



Fire classification

FL-EF

Fire properties

acc. to UL94: HB

Chemical resistances



Resistant to:

Weak acids
Lyes
Fuels
Alcohol
Mineral oils

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

General information



Made in Germany

All details given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described. The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described. A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information. All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge. They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose. Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information. Murrplastik accepts no liability for damage caused as a result of using our products. Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services. Our General Terms and Conditions apply.