




KWI terminal block label

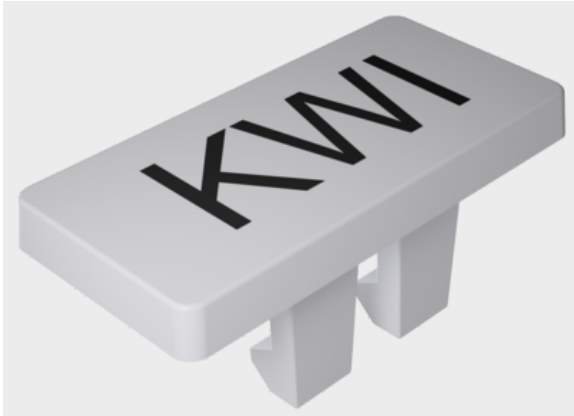

Product information


KWI - for terminal manufacturers Wieland, ABB Entelec, D+E, Legrand, Sprecher + Schuh, Telemecanique and Wago.

High-quality, halogen-free snap-in label plates. Labels available for mounting individually or in strips.

The large printable area at the top allows room for individual project and terminal block reference, without the need for additional organizational systems.

Label plates designated as "5 - 6 mm-grid strips" can be adapted to terminal block widths of 5 mm or 6 mm by means of an extension spring joint.

Information, conformities and approvals

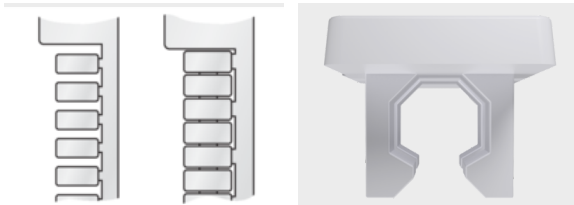

Article	Order No.	Color	RAL similar	Label size * mm	Printable area* mm	Number of characters / lines	Quantity per frame	Base plate	Software Article	PU pcs.
Single labels										
KWI 5/10	86401410	White	9016	5 x 10	5 x 10	5 / 1	64	GP4	20	1024
KWI 5/15	86401414	White	9016	5 x 15	5 x 15	8 / 1	64	GP4	21	1024
KWI 6/10	86401420	White	9016	6 x 10	6 x 10	5 / 1	64	GP4	22	1024
KWI 6/15	86401426	White	9016	6 x 15	6 x 15	8 / 1	64	GP4	23	1024
KWI 6/15	86401450	Orange	2011	6 x 15	6 x 15	8 / 1	64	GP4	230	1024
5 mm pitch strips in a row										
KWI 5/8.6-5	86401418	White	9016	5 x 8.6	5 x 8.6	4 / 1	88	GP4	24	1408
KWI 5/10-5	86401412	White	9016	5 x 10	5 x 10	5 / 1	88	GP4	25	1408
KWI 5/15-5	86401416	White	9016	5 x 15	5 x 15	8 / 1	88	GP4	26	1408
5 - 6 mm pitch strips										
KWI 5/10-5...6	86401432	White	9016	5 x 10	4 x 10	5 / 1	88	GP4	25U	1400
6 mm pitch strips in a row										



KWI terminal block label

Article	Order No.	Color	RAL similar	Label size * mm	Printable area* mm	Number of characters / lines	Quantity per frame	Base plate	Software Article	PU pcs.
KWI 6/8.2-6	86401430	White	9016	6 x 8.2	6 x 8.2	4 / 1	72	GP4	270	1008
KWI 6/10-6	86401422	White	9016	6 x 10	6 x 10	5 / 1	72	GP4	27	1008
KWI 6/15-6	86401428	White	9016	6 x 15	6 x 15	8 / 1	72	GP4	28	1008
6.8 mm pitch strips in a row										
KWI 6/10-6.8	86401424	White	9016	6 x 10	6 x 10	5 / 1	64	GP4	29	1024

Material properties



Polycarbonate (PC)

Thermal properties



Temperature / temperature range

-40 °C – 130 °C

Fire properties



Fire classification

V0

Technical information



Halogen-free

Classification

ETIM 9: EC000761
ECLASS 14: 27281101
UNSPSC 26.0801: 39131504

General technical data



Assembly method

0000000011000

Assembly method



Snap-fit system



KWI terminal block label

Assembly method



Strip system

Labelling technology



Plotter



Laser



Inkjet