


## KMG-F H ball bearing



### Product information

The detachably connected KMG/F-H is the perfect fixation for coiled heat conduits. Our ball joint can be placed into the SH-system holder quickly and easily and is mostly used for robot applications and other smaller handling equipment. This way your heat conduits are routed and protected for any application with absolute process safety.

### Information, conformities and approvals

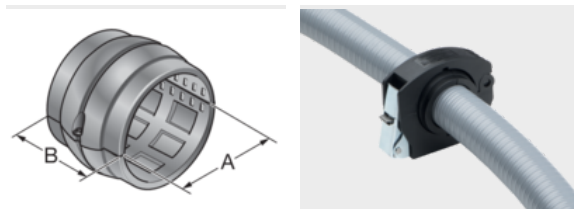

Article	Order No.	Color	A mm	B mm	C mm	Suitable for System holder	Version	PU pcs.
KMG-F H45/13	83691670	Black	45.7	44	45	SH-P/M40-M50	Split	1
KMG-F H55/16	83691672	Black	55.25	44	55	SH-P/M40-M50	Split	1
KMG-F H66/25	83691674	Black	66.5	45	65	SH 56/70	Split	1
KMG-F H45/13 set 1) 1**)	83691602	Black			45		Split	1
KMG-F H55/16 set 2) 1**)	83691604	Black			55		Split	1
KMG-F H66/25 set 3)	83691606	Black			65		Split	1

1) Set consists of KMG-F H45/13 and SH M40/M50

2) Set consists of KMG-F H55/16 and SH M40/M50

3) Set consists of KMG-F H 66/25 and SH 56/70

1\*\*) No stock goods, delivery time and minimum order quantities upon request

1) Set consists of KMG-F H45/13 and SH M40/M50

2) Set consists of KMG-F H55/16 and SH M40/M50

3) Set consists of KMG-F H 66/25 and SH 56/70

1\*\*) No stock goods, delivery time and minimum order quantities upon request

### Material properties



mod. polyamide

## KMG-F H ball bearing

### Thermal properties



Temperature / temperature range

-40 °C - 110 °C

### Fire properties



Fire classification

acc. to UL94: V0

### Technical information



Halogen-free

### Conformity



RoHS (EC Directive 2011/65/EU)

### Approvals and operating permits



ROBI approval

### Classification

ETIM 9: EC010745  
ECLASS 14: 27439090  
UNSPSC 26.0801: 40141764

### General information



Made in Germany