




Label holder KME/L

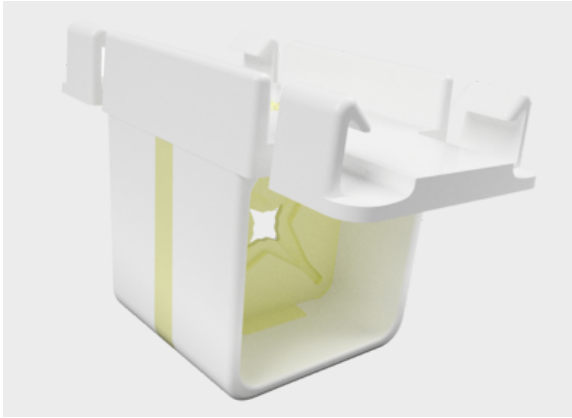


Product information

High-quality, halogen-free two-part label holder for the highest requirements. The additional soft component protects the wires and cable covering from damage. The elastomer adapts to the different diameters of the cable. The geometry of the label holder allows the use of different label lengths.

Cross section range from 1.6 mm - 7.8 mm
Three label lengths of the KSO can be used
Flexible label exchange possible

Information, conformities and approvals



Article	Order No.	Color	Application range from - to mm (C)	Recommended Label	PU pcs.
KME/L	86383041	White	1.6 - 7.8	KSO 20x9, 35x9, 70x9	50

Material properties



Thermoplastic elastomer (TPE)
Polycarbonate (PC)

Thermal properties



Temperature / temperature range
-40 °C - 100 °C

Fire properties



Fire classification
V0

Technical information



Halogen-free



Label holder KME/L

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

General technical data



Assembly method

0000001000000

Assembly method



Self-clamping system