




LMM Rectangular with radius

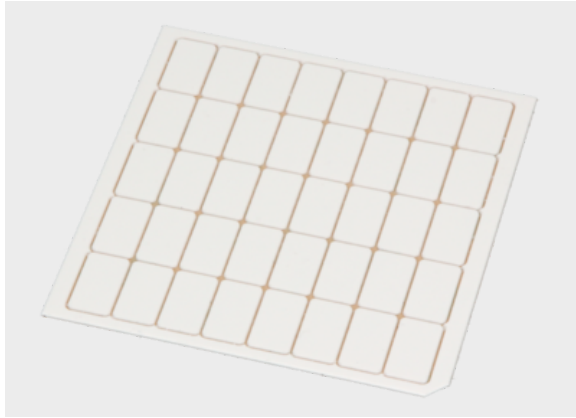


Product information

The LMM Laser Monomatt was developed for marking with a Murrplastik laser system.

- Custom configuration
- 1 mm thick single layer white polycarbonate
- Excellent labeling characteristics
- Different geometries and holes
- Three different carrier materials available


Information, conformities and approvals

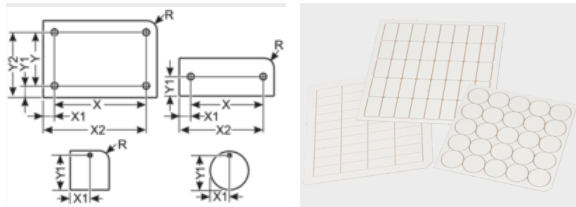

Article	Order No.	Color	Material thickness mm	Printable area mm	No. characters/lines	Quantity per frame	Base plate	Software Article	PU pcs.
---------	-----------	-------	-----------------------	-------------------	----------------------	--------------------	------------	------------------	---------

Rectangular design with corner radius

LMM 13x22 R2 SK	8610240012	White	1	13 x 22	7 / 6	40	GP 120x120	MB1	160
LMM 27x19 R2 SK	8610240016	White	1	27 x 19	15 / 5	20		ON2	80
LMM 55x19 R2 SKS	8610240019	White	1	55 x 19	30 / 5	10	GP 120x120	OVD	40
LMM 55x55 R2 SKS	8610240018	White	1	55 x 55	30 / 16	4	GP 120x120	OVC	16



Article	Order No.	Outside radius R mm	Radius mm	Adhesive
LMM 27x19 R2 SK	8610240016	2	2	Self-adhesive foil



LMM Rectangular with radius

Article	Order No.	Outside radius R mm	Radius mm	Adhesive
LMM 55x19 R2 SKS	8610240019	2	2	Self-adhesive foil
LMM 55x55 R2 SKS	8610240018	2	2	Self-adhesive foil

Material properties



Polycarbonate (PC)

Adhesive properties



468
5016SK adhesive film with adhesive
SKS adhesive film with foam adhesive

Thermal properties



Temperature / temperature range
-40 °C - 130 °C

Fire properties



Fire classification
V0

Technical information



Halogen-free

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Assembly method
00000001Label glued into place 00000

Assembly method



Adhesive system



LMM Rectangular with radius

Labelling technology



Laser
