






Shielding clamp type SK

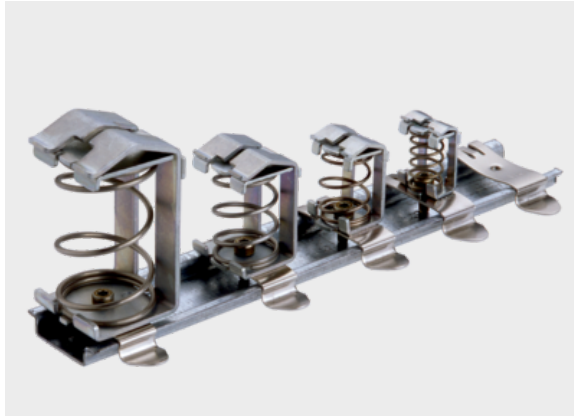

Product information

The shielding clamp may be used where the shield of individual cables must be connected with the ground potential. The SK can be either screwed down on the mounting plate or snapped on to the 35 mm top hat rail (EN 50022) by means of a mounting foot. SK mounting foot not included in delivery. Please order separately.

Information, conformities and approvals



Article	Order No.	Color	Fastening	for shield of Ø mm	A mm	B mm	EH mm	PU pcs.
SK 3 - 8	87201060	Material color	M4x0,7	3 - 8	18	13.5	26	10
SK 4 - 13.5	87201062	Material color	M4x0,7	4 - 13.5	20	20	32.5	10
SK 10 - 20	87201064	Material color	M4x0,7	10 - 20	26	25	40	10
SK 15 - 32	87201066	Material color	M4x0,7	15 - 32	32.5	33.5	64	10
SK mounting foot	87201070	Material color			13	50		10

Material properties



Galvanised sheet steel

Conformity



RoHS (EC Directive 2011/65/EU)



Shielding clamp type SK

Classification

ETIM 9: EC002623
ECLASS 14: 27182804
