



BS label plate




Product information

High-quality, halogen-free label plate for single-line and multi-line inscription. The BS label plate is mounted directly with a cable tie.

BS 5 and BS 5-2 are suitable for lengthwise mounting. BS 6 can be mounted lengthways and across.

Information, conformities and approvals

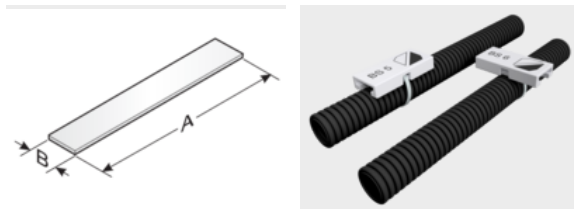

Article	Order No.	Color	RAL equiv.	Label size (A x B) mm	Printable area mm	Number of characters / lines	Quantity per frame	Cable ties max. width mm	Software Article	Base plate	PU pcs.
For lengthways mounting (long mat version)											
BS 5L	86281070	White	9016	12 x 27	12 x 27	15 / 3	16	3	80D	GP4L	192
BS 5L	86281071	Yellow	1018	12 x 27	12 x 27	15 / 3	16	3	80E	GP4L	192
For lengthways or crossways mounting (long mat version)											
BS 6L	86281076	White	9016	12 x 27	12 x 27	15 / 3	16	3	81A	GP4L	192
For lengthways mounting											
BS 5-2	86281031	Yellow	1018	12 x 55	12 x 55	30 / 3	8	3	108	none	96

Material properties



Polycarbonate (PC)



BS label plate

Thermal properties



Temperature / temperature range

-40 °C - 130 °C

Fire properties



Fire classification

V0

Technical information



Halogen-free

Classification

ETIM 9: EC001530
ECLASS 14: 27281102
UNSPSC 26.0801: 39131504

General technical data



Assembly method

00010000000000

Assembly method



Cable tie system with plate

Labelling technology



Plotter



Laser



Inkjet