




ALU Rectangular without radius, 6x hole


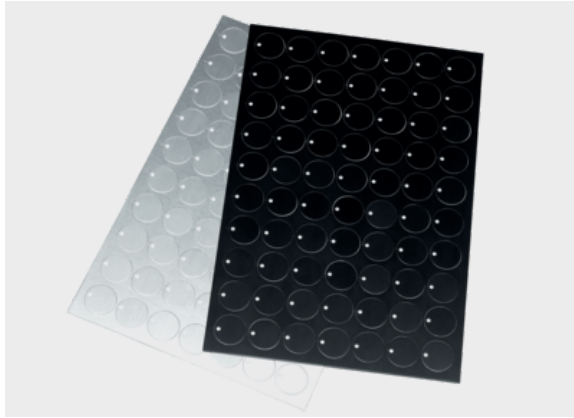


Product information

The ALU labeling material, in mat size 300x200 mm, has been developed especially for engraving.

- Coloured anodised aluminium material
- Available with self-adhesive foil / adhesive foil
- Individual or prefab labels
- Temperature range up to approx. 200 °C
- Thickness: 1.0 mm
- marking technique: Engraving


Information, conformities and approvals



| Article | Order No. | Color | Label size mm | Number x Holes mm | Material thickness mm | Quantity per mat | Software Article | PU pcs. |
|---|------------|-----------------|---------------|-------------------|-----------------------|------------------|------------------|---------|
| Without corner radius; with self-adhesive foil | | | | | | | | |
| ALU 130x70 SK, 6x3,2MM 1) | 8604290000 | Silver anodized | 130 x 70 | 6x 3.2 | 1 | 4 | 225 | 4 |
| ALU 210x100 SK, 6x3.0MM 1) | 8604240001 | Silver anodized | 210 x 100 | 6x 3.0 | 1 | 2 | 370 | 2 |

1) Other sizes available on request

1) Other sizes available on request



| Article | Order No. | Drill hole pitch Y mm | Drill hole position X1 mm | Drill hole position Y1 mm | Drill hole position X2 mm | Drill hole position Y2 mm | Drill hole position X3 mm |
|-------------------------------|------------|-----------------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------|
| ALU 130x70 SK, 6x3,2MM 1) | 8604290000 | 60 | 5 | 5 | 95 | 65 | 125 |
| ALU 210x100 SK, 6x3.0MM 1) | 8604240001 | 90 | 5 | 5 | 105 | 95 | 205 |



ALU Rectangular without radius, 6x hole

| Article | Order No. | Drill hole pitch Y mm | Drill hole position X1 mm | Drill hole position Y1 mm | Drill hole position X2 mm | Drill hole position Y2 mm | Drill hole position X3 mm |
|-------------------------------------|-----------|--------------------------|------------------------------|------------------------------|------------------------------|------------------------------|------------------------------|
| 1) Other sizes available on request | | | | | | | |

Material properties



Aluminium anodised (ALU)

Adhesive properties



467SK adhesive film with adhesive

Thermal properties



Temperature / temperature range

-40 °C - 140 °C

Fire properties



Fire classification

V0

Classification

ETIM 9: EC001288
ECLASS 14: 27144009
UNSPSC 26.0801: 39131504

General technical data



Assembly method

00000001Label glued into place 0001Mounting the label with screws 0

Assembly method



Adhesive system



Screw system

Labelling technology



Engraving

Information given in our sales brochures and catalogues, as well as the information available online, are based on our current knowledge of the products described.

The electronic data and files made available by Murrplastik, particularly CAD files are based on our current knowledge of the product described.

A legally binding assurance of certain properties or the suitability for a certain purpose can not be determined from this information.

All information with respect to the chemical and physical properties of Murrplastik products, as well as application advice given verbally, in writing or by tests, is given to the best of our knowledge.

They do not release the buyer from the obligation to carry out his own tests and trials in order to determine the concrete suitability of the products for the intended purpose.

Murrplastik accepts no responsibility for the available information being up-to-date, correct or complete. Neither do we accept responsibility for the quality of this information.

Murrplastik accepts no liability for damage caused as a result of using our products.

Murrplastik reserves the right to make technical changes and improvements through constant further development of products and services.

Our General Terms and Conditions apply.