



Discharge plate type KDL-AB




Product information

The AB-EMV discharge bracket is made of stainless steel 1.4301 (V2A) or galvanized steel. It is suitable in conjunction with all cable entry plates - and is available in sizes 24 and 16 for attaching EMC clips for busbars 10x3mm so that interference currents can be discharged. The discharge plate is installed on the inside of the control cabinet, directly with the fastening screws of the KDP / KDL. The special advantages of the AB-EMV discharge plate are:

- Easy assembly
- Compact design
- RoHS compliant

Information, conformities and approvals

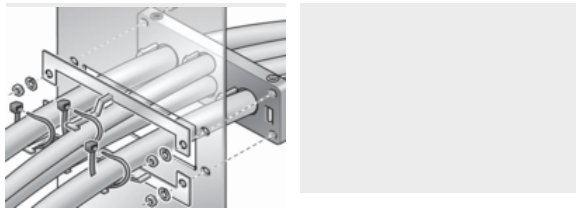

Article	Order No.	No. discharges	Flexa-T old	PU pcs.
KDL-AB 24/6-EMV/EMV	87252438	6	KDL/C 24/12 KDL/D 24/12	1
KDL-AB 16/2-EMV/EMV	87252410	2	KDL 16/2 KDL/E 16/2	1
KDL-AB 16/4-EMV/EMV	87252412	4	KDL 16/4	1
KDL-AB 24/3-EMV/EMV	87252414	3	KDL 24/3	1
KDL-AB 24/5-EMV/EMV	87252416	5	KDL 24/5 KDL 2/10 KDL 3/15	1

Material properties



Stainless steel 1.4310

Conformity



RoHS (EC Directive 2011/65/EU)



Discharge plate type KDL-AB

Classification

ETIM 9: EC002623
ECLASS 14: 27182804
