




Typ VT

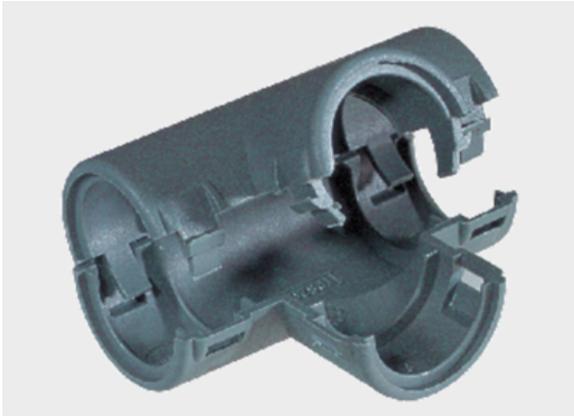



Product information

The VT conduit distributors are made of specially modified polyamide 6. They are used for coupling Murrplastik cable protection conduits of the same and different diameters.

The distributors feature the following advantages:

- Easy assembly by latching
- Split version makes routing of cables easy
- Distributor envelops the conduit, which means that the entire inside diameter of the conduit is available

Information, conformities and approvals



Article	Order No.	Color	For Murrflex with NW1 / NW2 / NW3	A mm	C mm	PU pcs.
VT 080808	83702410	Black	06 / 06 / 06	31.1	45.2	10
VT 101010	83980007	Black	07 / 07 / 07	45.2	31.1	10
VT 120808	83702412	Black	09 / 06 / 06	31.1	45.2	10
VT 120812	83702414	Black	09 / 06 / 09	31.1	45.2	10
VT 121208	83702416	Black	09 / 09 / 06	31.1	45.2	10
VT 121212	83702418	Black	09 / 09 / 09	31.1	45.2	10
VT 160816	83702420	Black	11 / 06 / 11	34.8	49.1	10
VT 161212	83702422	Black	11 / 09 / 09	34.8	49.1	10
VT 161216	83702424	Black	11 / 09 / 11	34.8	49.1	10
VT 161612	83702426	Black	11 / 11 / 09	34.8	49.1	10
VT 161616	83702428	Black	11 / 11 / 11	34.8	49.1	10
VT 200820	83702430	Black	16 / 06 / 16	41	56.5	10
VT 201216	83702432	Black	16 / 09 / 11	41	56.5	10



Typ VT

Article	Order No.	Color	For Murrflex with NW1 / NW2 / NW3	A mm	C mm	PU pcs.
VT 201220	83702434	Black	16 / 09 / 16	41	56.5	10
VT 201616	83702436	Black	16 / 11 / 11	41	56.5	10
VT 201620	83702438	Black	16 / 11 / 16	41	56.5	10
VT 202016	83702440	Black	16 / 16 / 11	41	56.5	10
VT 202020	83702441	Black	16 / 16 / 16	41	56.5	10
VT 281220	83702442	Black	21 / 09 / 16	48.6	64.5	10
VT 281620	83702444	Black	21 / 11 / 16	48.6	64.5	10
VT 282020	83702446	Black	21 / 16 / 16	48.6	64.5	10
VT 281228	83702448	Black	21 / 09 / 21	48.6	64.5	10
VT 281628	83702450	Black	21 / 11 / 21	48.6	64.5	10
VT 282028	83702452	Black	21 / 16 / 21	48.6	64.5	10
VT 282828	83702454	Black	21 / 21 / 21	48.6	64.5	10
VT 321632	83702456	Black	29 / 11 / 29	55.3	72	10
VT 322028	83702457	Black	29 / 16 / 21	55.3	72	10
VT 322032	83702458	Black	29 / 16 / 29	55.3	72	10
VT 323232	83702460	Black	29 / 29 / 29	72	55.3	10

Material properties



mod. polyamide PA 6

Thermal properties



Temperature / temperature range

-40 °C - 110 °C / short term: 140 °C

Protection class



Protection class

IP42



Typ VT

Fire properties



Fire classification

acc. to UL94: V0 self-extinguishing

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

Classification

ETIM 9: EC001172
ECLASS 14: 27430313

Compatibility/combination possibilities of murrplastik products

Holder / Conduit	EW	EW...S	EWX	EW-LS	EWT
USH	✓	✓	✓	✓	✓
UHE	✓	✓	✓	✓	✓
UH-S	✓	✓	✓	✓	✓
UH + BL	✓	✓	✓	✓	✓

Fitting / Conduit	EW	EW...S	EWX	EW-LS	EWT
M-FIX	✓	✓	✓	✓	✓
M-TEC	✓	✓	✓	✓	✓
M-TOP	✓	✓	✓	✓	✓
M-PRO	✓	✓	✓	✓	✓
KFW/D	✓	✓	x	✓	✓
KFW/X	x	x	✓	x	x
SVT	✓	x	x	✓	✓
SVT/X	x	x	✓	x	x

Other products / Conduit	EW	EW...S	EWX	EW-LS	EWT
PR/SV	✓	x	x	✓	✓
AT	✓	✓	✓	✓	✓
SVG	✓	x	x	✓	✓
VT	✓	✓	✓	✓	✓
YTPE-F	✓	✓	✓	✓	✓

SAT-GF / Holder	USH	UHE	UH-S	UH + BL
SAT-GF	x	✓	✓	x

SAT-GF / Fitting	M-FIX	M-TEC	M-TOP	M-PRO
SAT-GF	✓	✓	x	✓