



## DMG Rectangular without radius, 4x hole

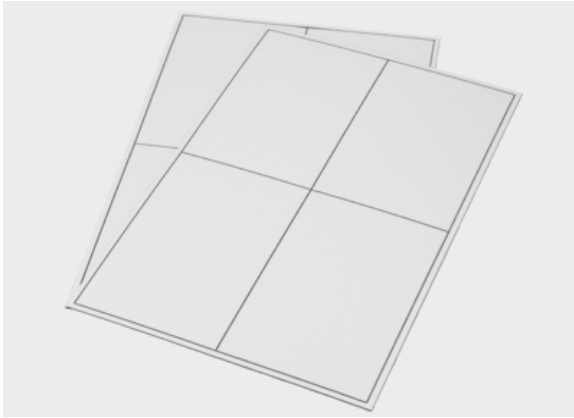

### Product information

- Duomatt is a double-layer material with an UV resistant colored outer layer for marking with a Murrplastik engraving or plotter system.
- Available in various color combinations
- Three different carrier materials available
- Different geometries and holes
- UV resistant outer layer
- Material thickness 0.8 mm

### Information, conformities and approvals

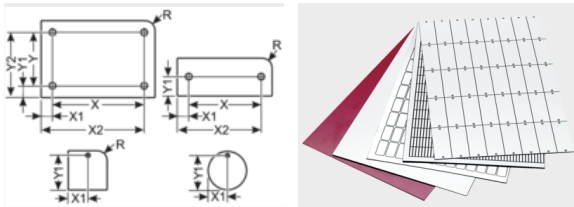

Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
<b>Without corner radius; with high-strength adhesive foam foil</b>								
DMG 100x100 SKS, 4x2.6MM 1)	8602242003	Siemens silver / Black	100 x 100	4x 2.6	0.8	6	316	6
DMG 300x120 SKS, 4x4.0MM 1)	8602242005	Yellow / Black	300 x 120	4x 4.0	0.8	1	M87	1
DMG 49.5x99.5 SKS, 4x2.9MM 1)	8602242004	Siemens silver / Black	49.5 x 99.5	4x 2.9	0.8	12	L90	12
DMG 75x100 SKS, 4x2.6MM 1)	8602242002	Siemens silver / Black	75 x 100	4x 2.6	0.8	8	315	8
DMG 75x100 SKS, 4x2.6MM 1)	8602242001	White / Black	75 x 100	4x 2.6	0.8	8	GA2	8
DMG° 100x100 SKS, 4x2.6MM 1)	8602242000	White / Black	100 x 100	4x 2.6	0.8	6	GA1	6
<b>Without corner radius; with adhesive foil</b>								
DMG 100x200 HF, 4x2.6MM 1)	8602246001	Siemens silver / Black	100 x 200	4x 2.6	1.5	3	663	3
DMG 149x99 HF, 4x3.5MM 1)	8602246003	Siemens silver / Black	149 x 99	4x 3.5	1.5	4	K82	4
DMG 75x100 HF, 4x2.6MM 1)	8602246002	Siemens silver / Black	75 x 100	4x 2.6	0.8	8	1V	8
DMG 75x100 HF, 4x2.6MM	8602246000	Silver / Black	75 x 100	4x 2.6	0.8	8	355	8



## DMG Rectangular without radius, 4x hole

Article	Order No.	Color	Label size mm	Number x Holes mm	Material thickness mm	Quantity per mat	Software Article	PU pcs.
1) Without corner radius; with self-adhesive foil								
DMG 150x200 SK, 4x3.0MM	8602240003	Siemens silver / Black	150 x 200	4x 3.0	0.8	2	H94	2
1)								
DMG 300x38 SK, 4x4.0MM	8602240002	White / Black	300 x 38	4x 4.0	1.5	5	4X	5
1)								
DMG 65x190 SK, 4x24.0MM	8602240000	White / Black	65 x 190	4x 24,0 (Y)	0.8	4	149	4
1) Other sizes available on request								
1) Other sizes available on request								

### Adhesive properties



467  
5016SK adhesive film with adhesive  
SKS adhesive film with foam adhesive

### Thermal properties



Temperature / temperature range  
-30 °C - 80 °C

### Classification

ETIM 9: EC001288  
ECLASS 14: 27144009  
UNSPSC 26.0801: 39131504

### General technical data



Assembly method  
00000001Label glued into place 00000

### Assembly method



Adhesive system

### Labelling technology



Plotter



---

## DMG Rectangular without radius, 4x hole

---

### Labelling technology



Engraving

---